



1551 S. Vineyard Avenue  
Ontario, CA 91761  
(909) 923-1973

## **WIRING SCHEMATICS**

# **ON-ROAD VEHICLE CONVERSION SINGLE AND DUAL MOTOR APPLICATION**


**FOR SOFTWARE VERSIONS 5.13 AND HIGHER**

**FOR CURTIS CONTROLLERS 1234/1236/1238**

**REVISION: B**  
**Date: 12/09/2013**

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

## ELECTRICAL SCHEMATIC FOR SINGLE MOTOR OR PRIMARY MOTOR IN A DUAL MOTOR CONFIGURATION 1234/1236/1238 CONTROLLERS

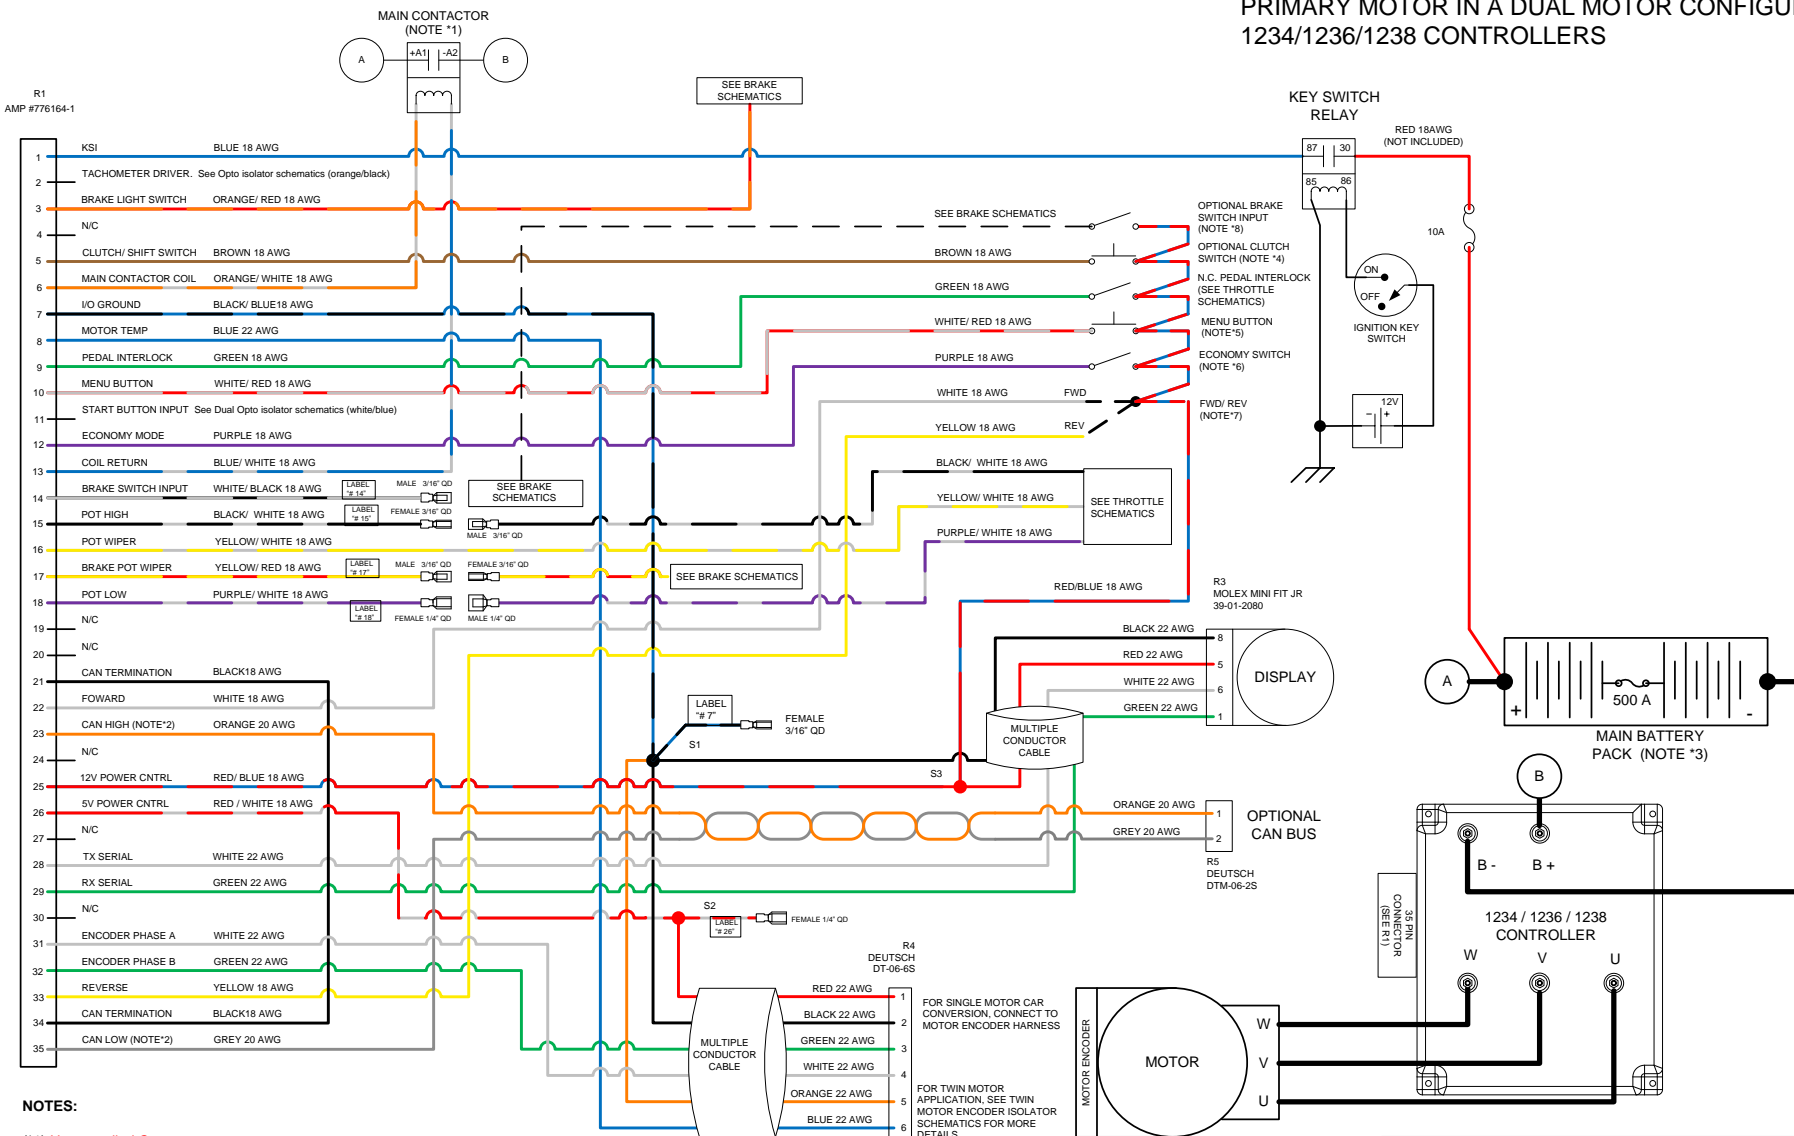

### NOTES:

(\*1) Use supplied Contactor.

(\*2) The Controller CAN Communication needs to be isolated from other CAN based components. A CAN isolator may be needed. Possible source of CAN isolator is CANOP from B&B Electronics ([www.bb-elec.com](http://www.bb-elec.com))

(\*3) A Battery Management System (BMS) is strongly recommended if Lithium Ion batteries are used. A possible source of BMS is Ewert Energy System's ORION BMS ([www.orionbms.com](http://www.orionbms.com))

(\*4) Install the Optional Clutch/ Shift Switch so that is ON when the clutch pedals are pressed. When the clutch pedal is pressed, the Regen setting is changed to Shift Neutral Braking Parameter to prevent the motor from stalling during gear shifting. In a clutchless system, this allows the user to set the coast down rate of the motor so that the gears align properly See Instructions on SHIFT-NEUTRAL BRAKING PARAMETERS.

(\*5) Gives access to Drive System information. Required to access Programming and Diagnostic modes. See Programming Instructions.


(\*6) Allows the use of ECONO Mode Parameters. See Programming Instructions.

(\*7) Forward is CLOCKWISE motor rotation from Encoder end view. Depending on the transmission configuration, use either wire to obtain desired rotation. Use a FWD & REV Switch in direct drive applications.

CAD TYPE VISIO	APPLICABLE SOFTWARE      VERSION 5.13			
UNIT NONE	DRAWING      1010-AUTO-CONVERSION			
DRW SIZE A	TITLE  ON-ROAD VEHICLE CONVERSION / PRIMARY DUAL MOTOR SCHEMATICS			
DATE 2/12/13				
SUPPLIER PART		HW-AUTOCONVERSION-HPG		
SCALE NONE	SHEET 1 OF 1		REVISION    D	HPEVS


**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

## DUAL MOTOR – 1234/1236/1238 CONTROLLERS SECONDARY MOTOR ELECTRICAL SCHEMATICS

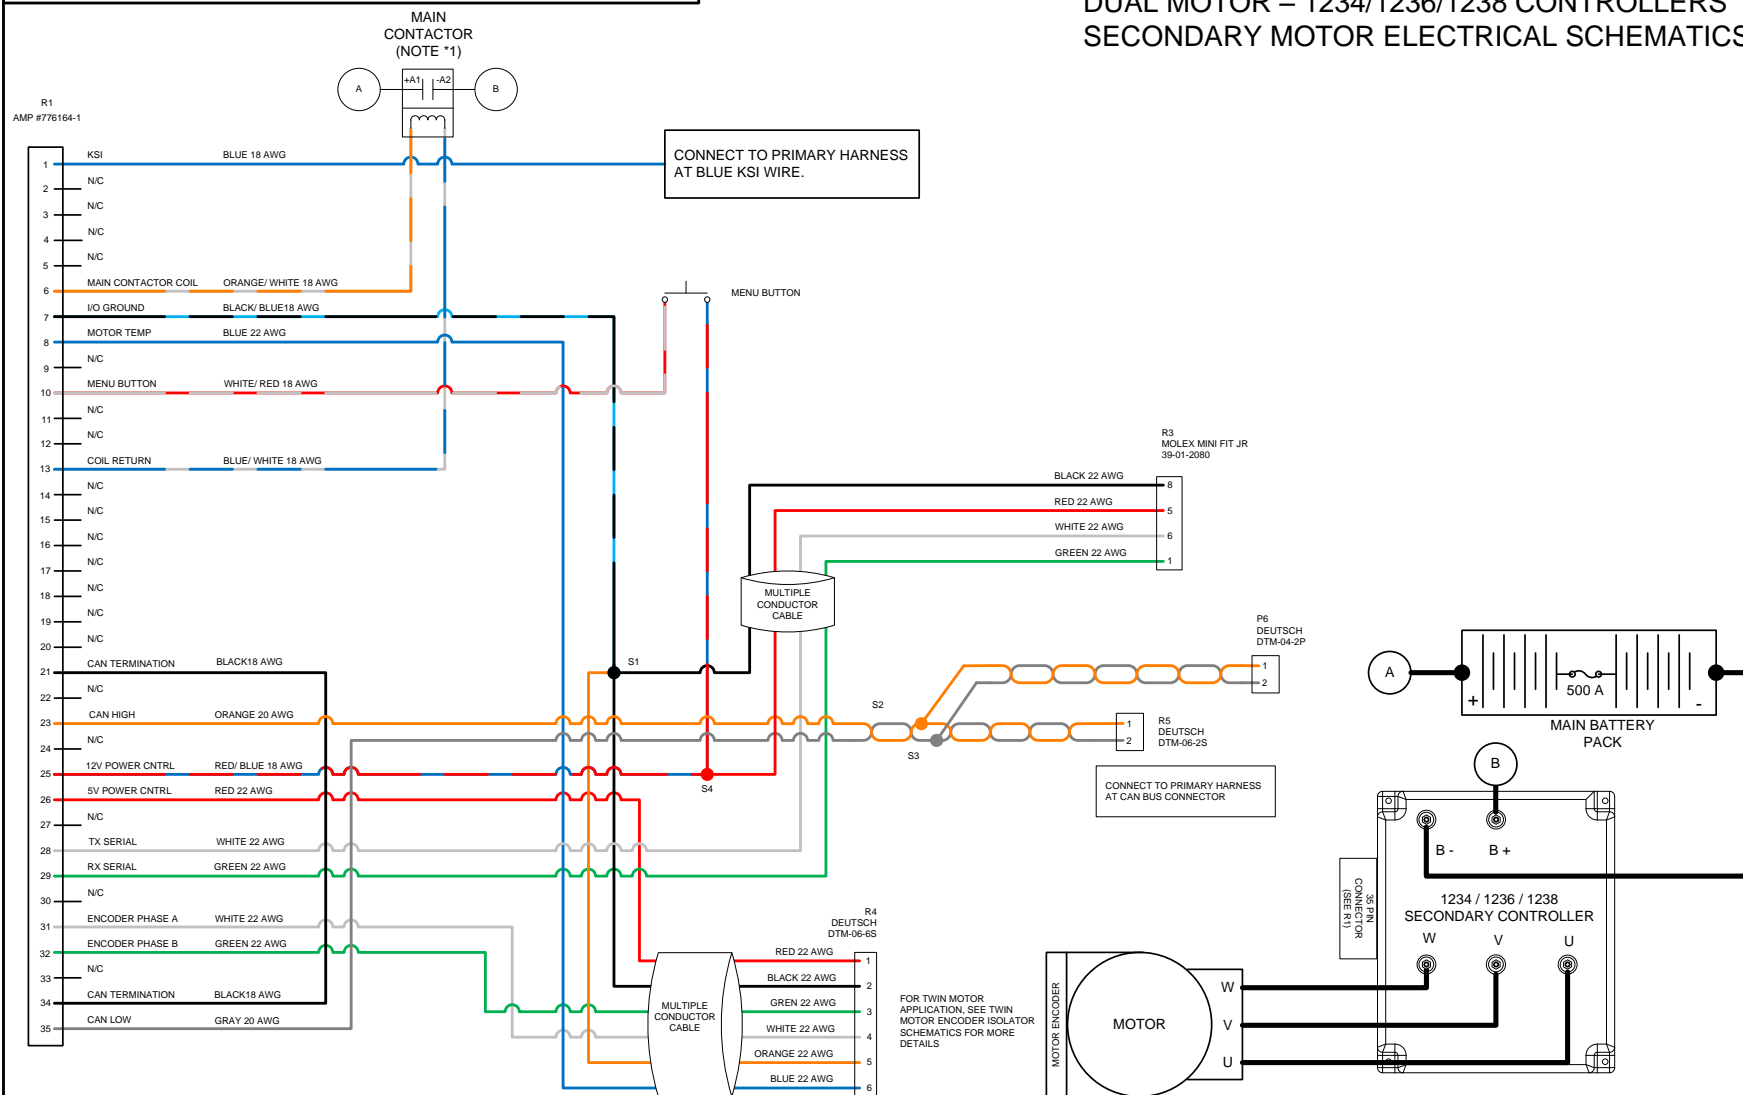

CAD TYPE	APPLICABLE SOFTWARE		
VISIO	VERSION 5.13		
UNIT	DRAWING		
NONE	1010-AUTO-CONVERSION-TWIN MOTOR		
DRW SIZE	TITLE		
A			
DATE	SECONDARY DUAL MOTOR SCHEMATICS		
4/2/13			
SCALE	SHEET 1 OF 1	REVISION	B
1:1			HPEVS


**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

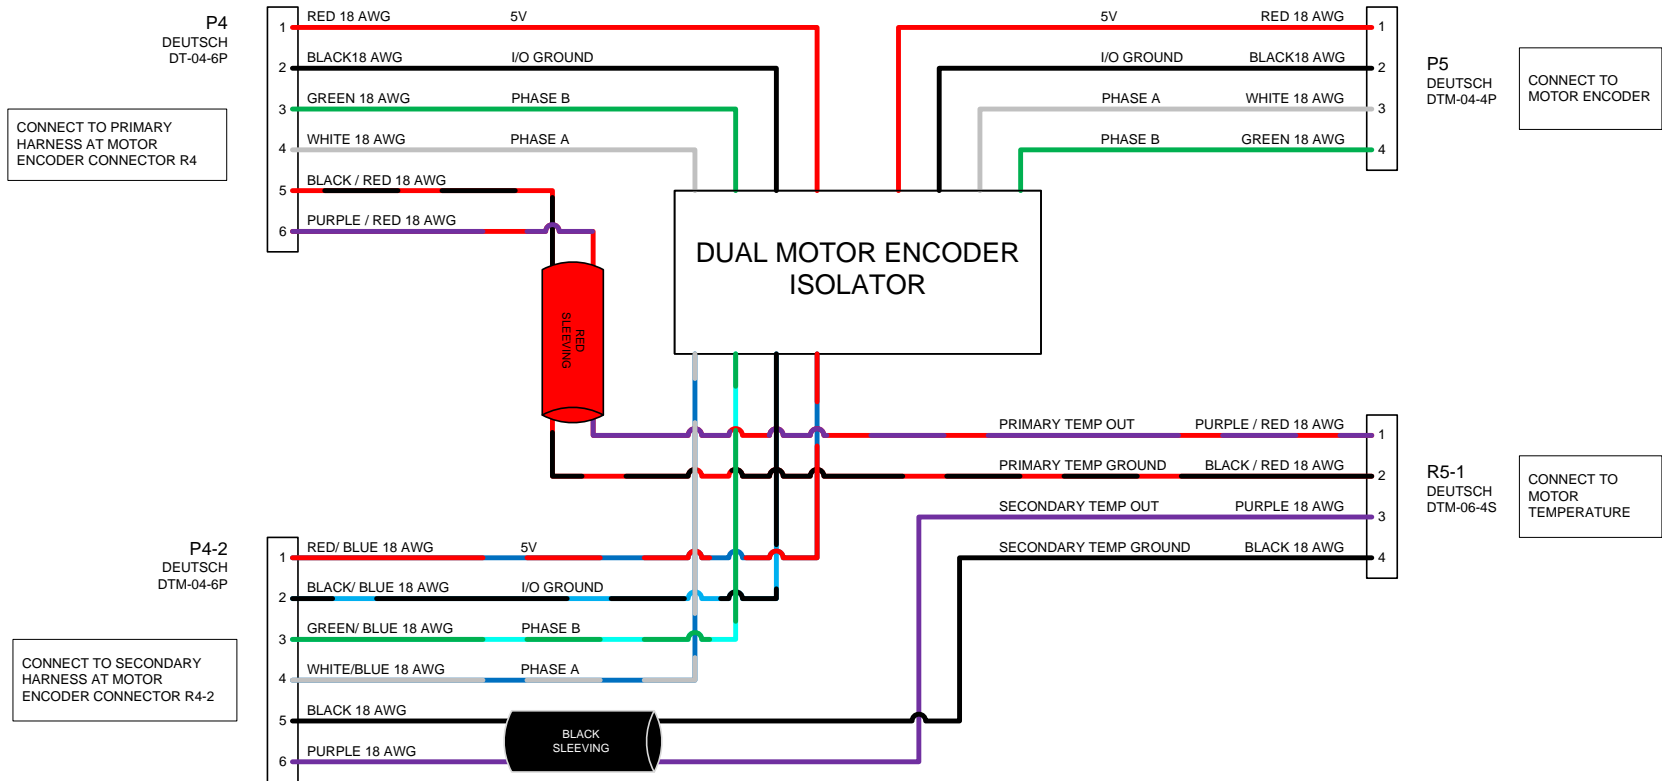

CAD TYPE VISIO	CAD LOC.	APPLICABLE SOFTWARE	DRW SIZE B
OPER. NO.	UNIT	DRAWING 1010-TWIN-ENCODER-ISOLATOR	
DESIGN	DETAIL	TITLE DUAL MOTOR ENCODER ISOLATOR SCHEMATICS	
CHECKED	SAFETY		
SCALE NONE	DATE 4/2/2013	REVISION A	HPEVS
		SHEET 1 OF 1	

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	3/1/2013
B	Revision for clarification	10/30/2013

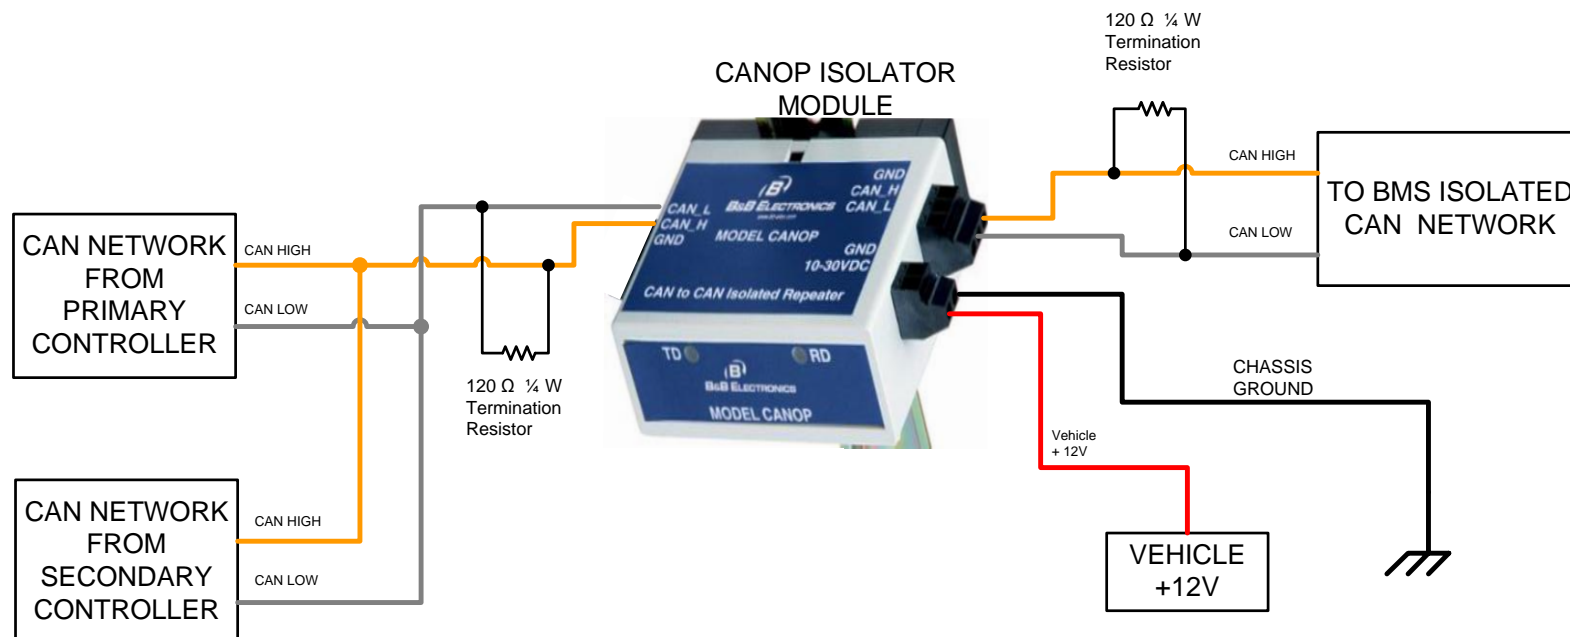

CAD TYPE	CAD LOC.	CAD FILE	DRW SIZE A
VISION	UNIT	DRAWING 1010-CAN-OP-ISOLATOR	
DESIGN	DETAIL	TITLE	
CHECKED	SAFETY	CAN ISOLATOR DUAL 1238 CONTROLLER	
SCALE	DATE	REVISION B	HPEVS
NONE	4/17/13	SHEET 1 OF 1	


## THROTTLE CONFIGURATION

Depending of the type of throttle used for the application, the different type of throttle configurations are listed within the table below. Electrical schematics are also included within the following pages.

THROTTLE CONFIGURATION	TYPE
ELECTRONIC without SWITCH	TYPE 1
2 WIRE with SWITCH 0-5k $\Omega$	TYPE 2
3 WIRE with SWITCH 0-5k $\Omega$	TYPE 3
CURTIS PB8 THROTTLE ASSEMBLY	TYPE 3

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	1/22/2013

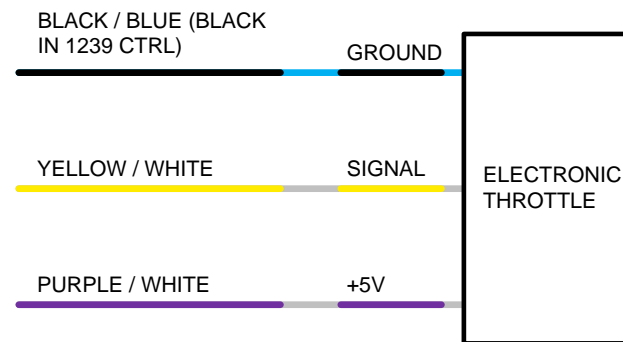


## TYPE 1 ELECTRONIC THROTTLE\*\*

\*\* When an electronic pedal is used, the GREEN wire from pedal interlock does not need to be connected

CAD TYPE VISIO	APPLICABLE SOFTWARE		
UNIT NONE	DRAWING 1010-THROTTLE-001		
DRW SIZE A	TITLE ELECTRONIC THROTTLE		
DATE 1/22/13			
SUPPLIER PART			
SCALE NONE	SHEET 4 OF 4	REVISION B	HPEVS

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	1/22/2013

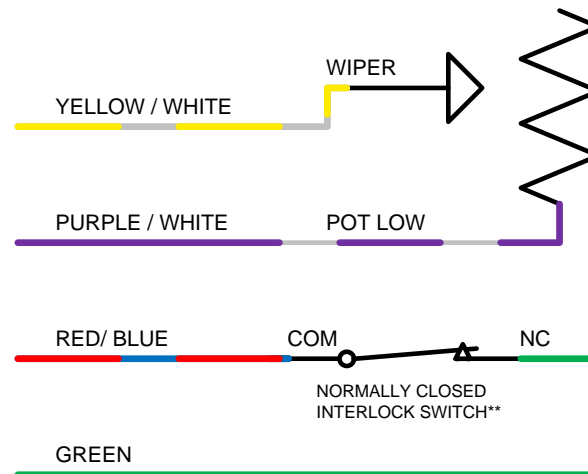

2 WIRE TYPE 2  
THROTTLE


\*\* When the accelerator pedal IS PRESSED the interlock switch is released to its NORMAL position (switch not activated) thus completing the circuit since its green wire is connected to the normally closed (NC) connection.

CAD TYPE VISO	CAD LOC.	CAD FILE	DRW SIZE A
OPER. NO.	UNIT	DRAWING 1010-THROTTLE-001	
DESIGN	DETAIL	TITLE	
CHECKED	SAFETY	2 WIRE TYPE 2 THROTTLE	
SCALE NONE	DATE 1/22/13	REVISION A SHEET 1 OF 3	HPEVS



**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	1/22/2013

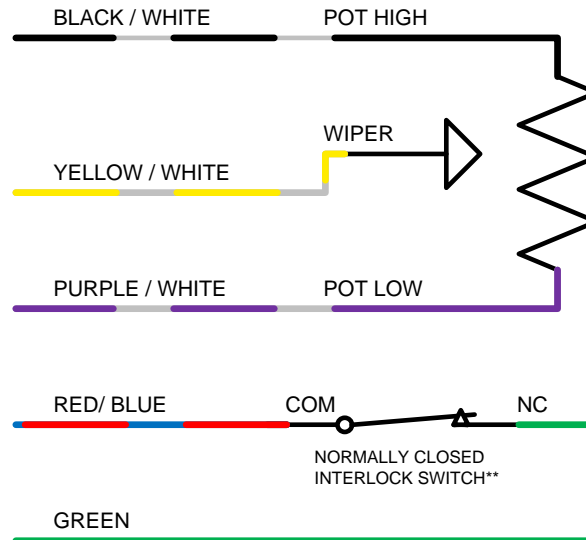


3 WIRE TYPE 3  
THROTTLE

\*\* When the accelerator pedal IS PRESSED the interlock switch is released to its NORMAL position (switch not activated) thus completing the circuit since its green wire is connected to the normally closed (NC) connection.

CAD TYPE VISIO	CAD LOC.	CAD FILE	DRW SIZE A
OPER. NO.	UNIT	DRAWING 1010-THROTTLE-001	
DESIGN	DETAIL	TITTLE 3 WIRE TYPE 3 THROTTLE	
CHECKED	SAFETY		
SCALE NONE	DATE 1/22/13	REVISION A SHEET 2 OF 3	HPEVS

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	11/27/2013

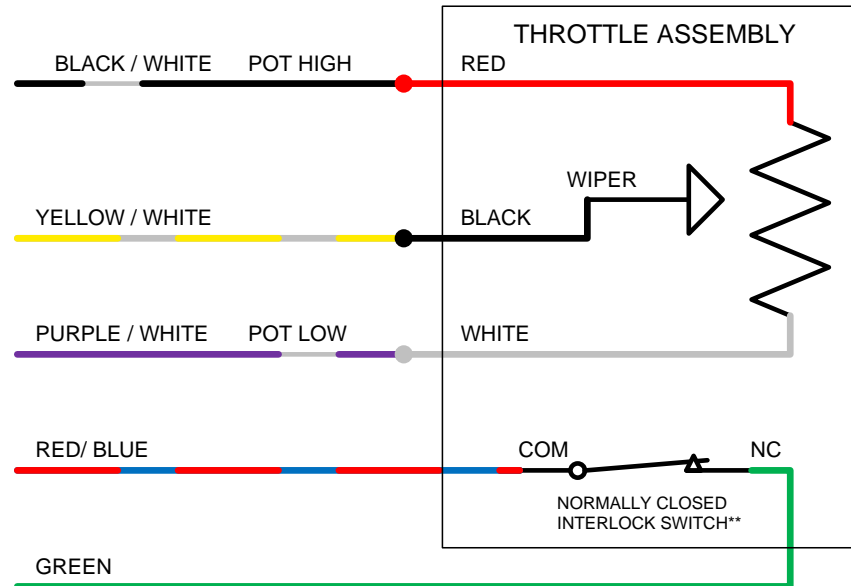

## CURTIS PB8 THROTTLE ASSEMBLY


\*\* When the accelerator pedal IS PRESSED the interlock switch is released to its NORMAL position (switch not activated) thus completing the circuit since its green wire is connected to the normally closed (NC) connection.

CAD TYPE VISIO	APPLICABLE SOFTWARE		
UNIT NONE	DRAWING 1010-THROTTLE-001		
DRW SIZE A	TITLE CURTIS PB8 THROTTLE ASSEMBLY		
DATE 1/22/13			
SUPPLIER PART			
SCALE NONE	SHEET 3 OF 4	REVISION A	HPEVS

## PEDAL INTERLOCK CONNECTION

The pedal interlock connection is required for both 2 and 3 wire throttle pot assemblies. The Green wire is connected to the Normally Closed tab. The red/blue wire is connected to the common tab. See picture below.

NOTE: when the accelerator pedal IS PRESSED the interlock switch is released to its NORMAL position (switch not activated) thus completing the circuit since its green wire is connected to the normally closed (NC) connection.

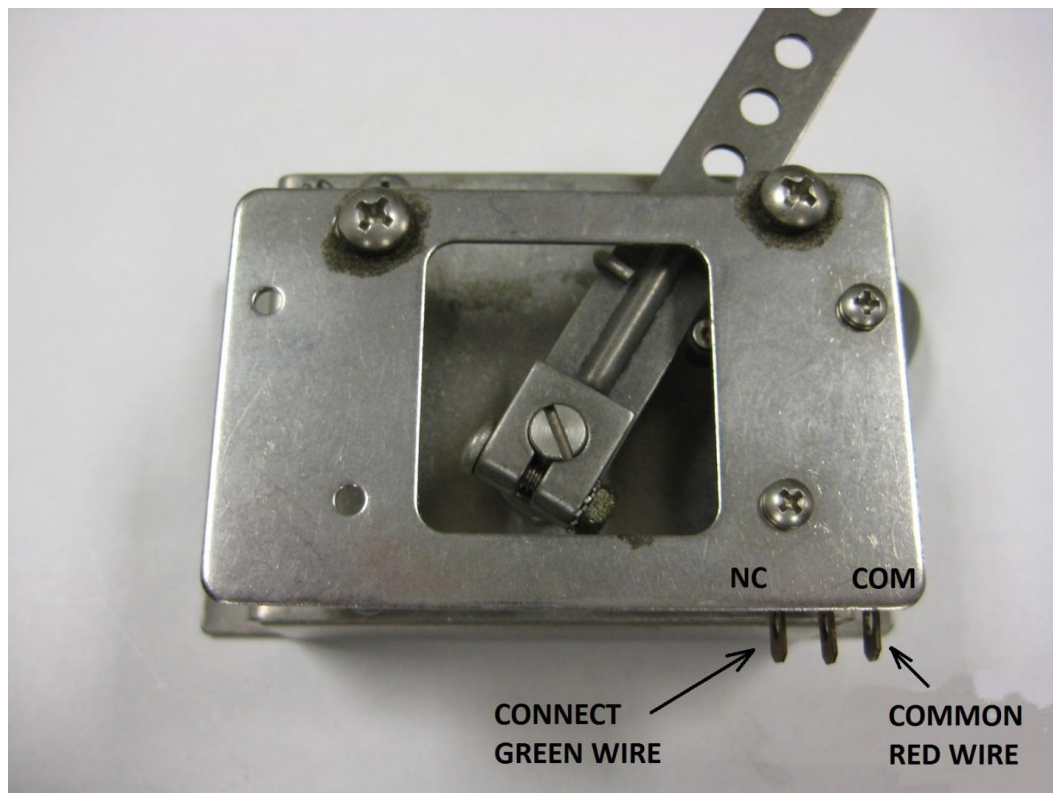


## BRAKE INPUT CONFIGURATION

Depending of the type of brake input used for the application, the different types of brake input configuration are listed below table. Electrical schematics are also included in the following pages.

<b>BRAKE INPUT CONFIGURATION</b>	<b>TYPE</b>
NO BRAKE POT INSTALLED	TYPE 0
PRESSURE TRANSDUCER/ ELECTRONIC 0-5V INPUT	TYPE 1
2 WIRE 0-5k $\Omega$ POT	TYPE 2
SWITCH	TYPE 3

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	2/19/2013

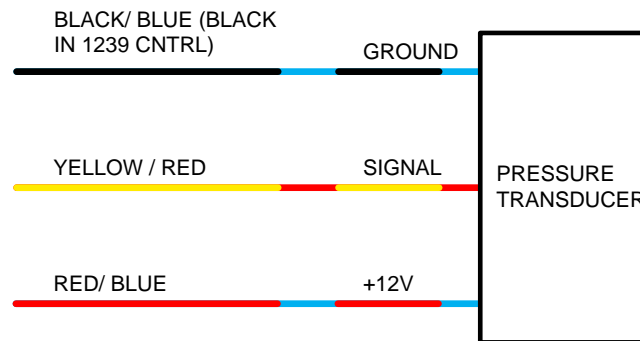


## TYPE 1 PRESSURE TRANSDUCER

**\*\* Typical Pressure Transducer Ratings**  
8-30 Volt Input  
1-5 Volt Output  
2500 PSI

CAD TYPE VISIO	CAD LOC.	CAD FILE	DRW SIZE A
OPER. NO.	UNIT	DRAWING 1010-BRAKE	
DESIGN	DETAIL	TITLE  PRESSURE TRANSDUCER	
CHECKED	SAFETY		
SCALE NONE	DATE 2/19/13	REVISION A SHEET 2 OF 2	<b>HPEVS</b>

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	2/19/2013

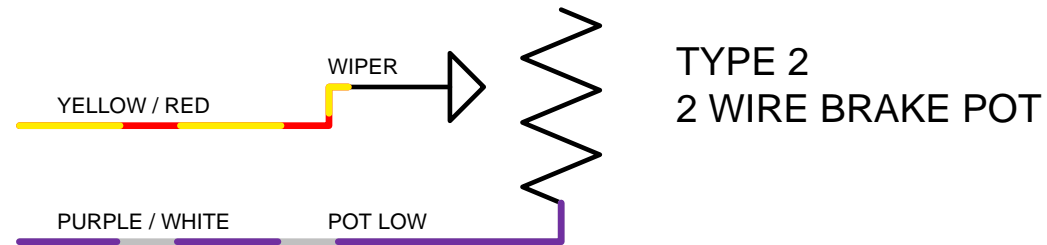

CAD TYPE VISO	CAD LOC.	CAD FILE	DRW SIZE A
OPER. NO.	UNIT	DRAWING 1010-BRAKE	
DESIGN	DETAIL	TITLE 2 WIRE BRAKE POT	
CHECKED	SAFETY		
SCALE NONE	DATE 2/19/13	REVISION A SHEET 1 OF 2	HPEVS


## OPTIONAL ACTIVE BRAKE LIGHT CONFIGURATIONS

These optional active brake light configurations are used to activate the brake lights during regenerative braking or when the vehicle brakes are being applied. Based on the brake type configuration that is being used in the application use one of the following wiring configurations.

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	2/19/2013

## ACTIVE BRAKE LIGHT CONFIGURATION OPTION 1 FOR BRAKE TYPE 0, 1 OR 2 CONFIGURATIONS

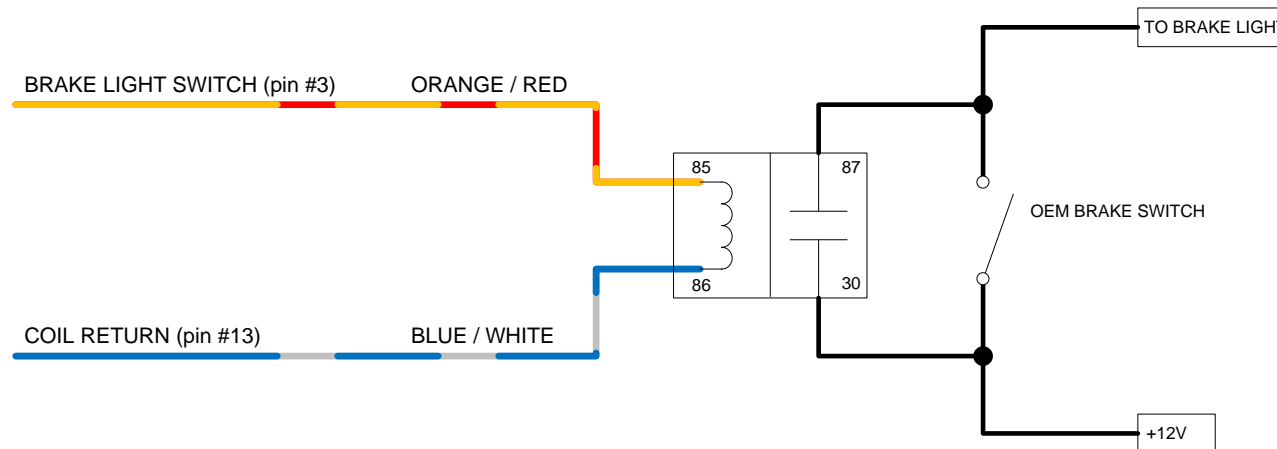

\*\* This option turns the brake lights ON during REGEN. Brake TYPE 0 does not allow for BOOSTED BRAKE while pressing the brake pedal. Brake TYPE 1 & 2 uses a variable input for BOOSTED REGEN.


CAD TYPE VISIO	CAD LOC.	CAD FILE	DRW SIZE A
OPER. NO.	UNIT	DRAWING 1010-BRAKE	
DESIGN	DETAIL	TITLE	
CHECKED	SAFETY	OPTION 1 BRAKE LIGHT SWITCH	
SCALE NONE	DATE 12/5/13	REVISION A SHEET 3 OF 4	HPEVS



**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	2/19/2013


## ACTIVE BRAKE LIGHT CONFIGURATION OPTION 2 FOR BRAKE TYPE 3 1234, 1236, & 1238 CONTROLLER

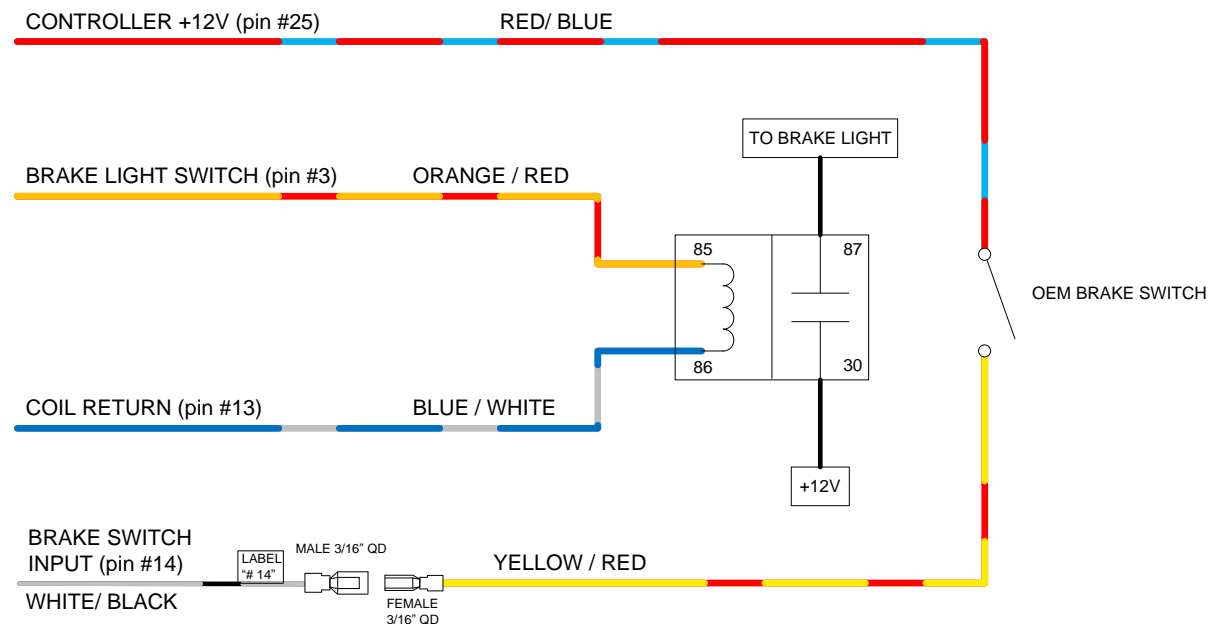

- \*\* This option will turn ON the brake lights when either of two conditions are satisfied:**
1. The users foot is OFF of the accelerator pedal and REGEN is active.
  2. Brake pressure is applied and the OEM brake switch is active.

CAD TYPE VISO	CAD LOC.	CAD FILE	DRW SIZE A
OPER. NO.	UNIT	DRAWING 1010-BRAKE	
DESIGN	DETAIL	TITLE	OPTION 2
CHECKED	SAFETY	BRAKE LIGHT SWITCH 1234, 1236, & 1238 CONTROLLER	
SCALE NONE	DATE 12/5/13	REVISION A	HPEVS
		SHEET 3 OF 4	

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

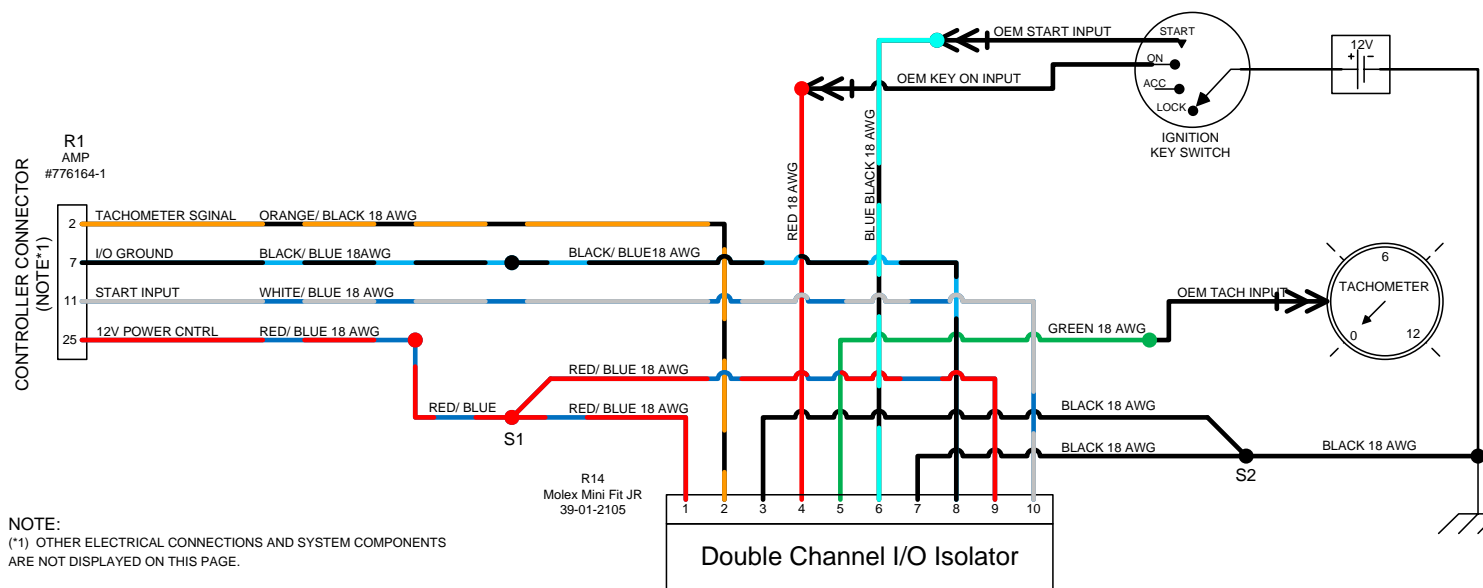

#### I/O ISOLATOR PIN FUNCTION

- 1 – CHANNEL 1 CONTROLLER 12V
- 2 – CHANNEL 1 TACHOMETER SIGNAL
- 3 – CHANNEL 1 GROUND
- 4 – CHANNEL 1 VEHICLE 12V
- 5 – CHANNEL 1 OUTPUT TO TACHOMETER
- 6 – CHANNEL 2 IGNITION KEY INPUT
- 7 – CHANNEL 2 GROUND
- 8 – CHANNEL 2 CONTROLLER I/O GROUND
- 9 – CHANNEL 2 CONTROLLER 12V
- 10 – CHANNEL 2 CONTROLLER START INPUT

CAD TYPE VISIO	CAD LOC.	CAD FILE	DRW SIZE B
OPER. NO.	UNIT	DRAWING 1010-2CH-ISOLATOR-001	
DESIGN	DETAIL	TITLE DUAL CHANNEL OPTO-ISOLATOR SYSTEM SCHEMATICS	
CHECKED	SAFETY		
SCALE NONE	DATE 4/19/12	REVISION B SHEET 1 OF 1	HPEVS