



1551 S. Vineyard Avenue  
Ontario, CA 91761  
(909) 923-1973

## **WIRING SCHEMATICS**


# **ON-ROAD VEHICLE CONVERSION SINGLE AND DUAL MOTOR APPLICATION**

**FOR SOFTWARE VERSIONS 5.13 AND HIGHER**

**FOR CURTIS CONTROLLERS 1234/1236/1238**


**REVISION: D**  
**Date: 8/5/15**

## ELECTRICAL SCHEMATICS FOR SINGLE MOTOR OR PRIMARY MOTOR IN DUAL MOTOR CONFIGURATION 1234/1236/1238 CONTROLLERS



CAD TYPE VISIO	APPLICABLE SOFTWARE      VERSION 5.13		
UNIT NONE	DRAWING      1010-AUTO-CONVERSION		
DRW SIZE A	TITLE  ON-ROAD VEHICLE CONVERSION / PRIMARY DUAL MOTOR SCHEMATICS		
DATE 2/12/13			
SUPPLIER PART		HW-AUTOCONVERSION-HPG	
SCALE NONE	SHEET 1 OF 1	REVISION    D	<b>HPEVS</b>

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems, Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

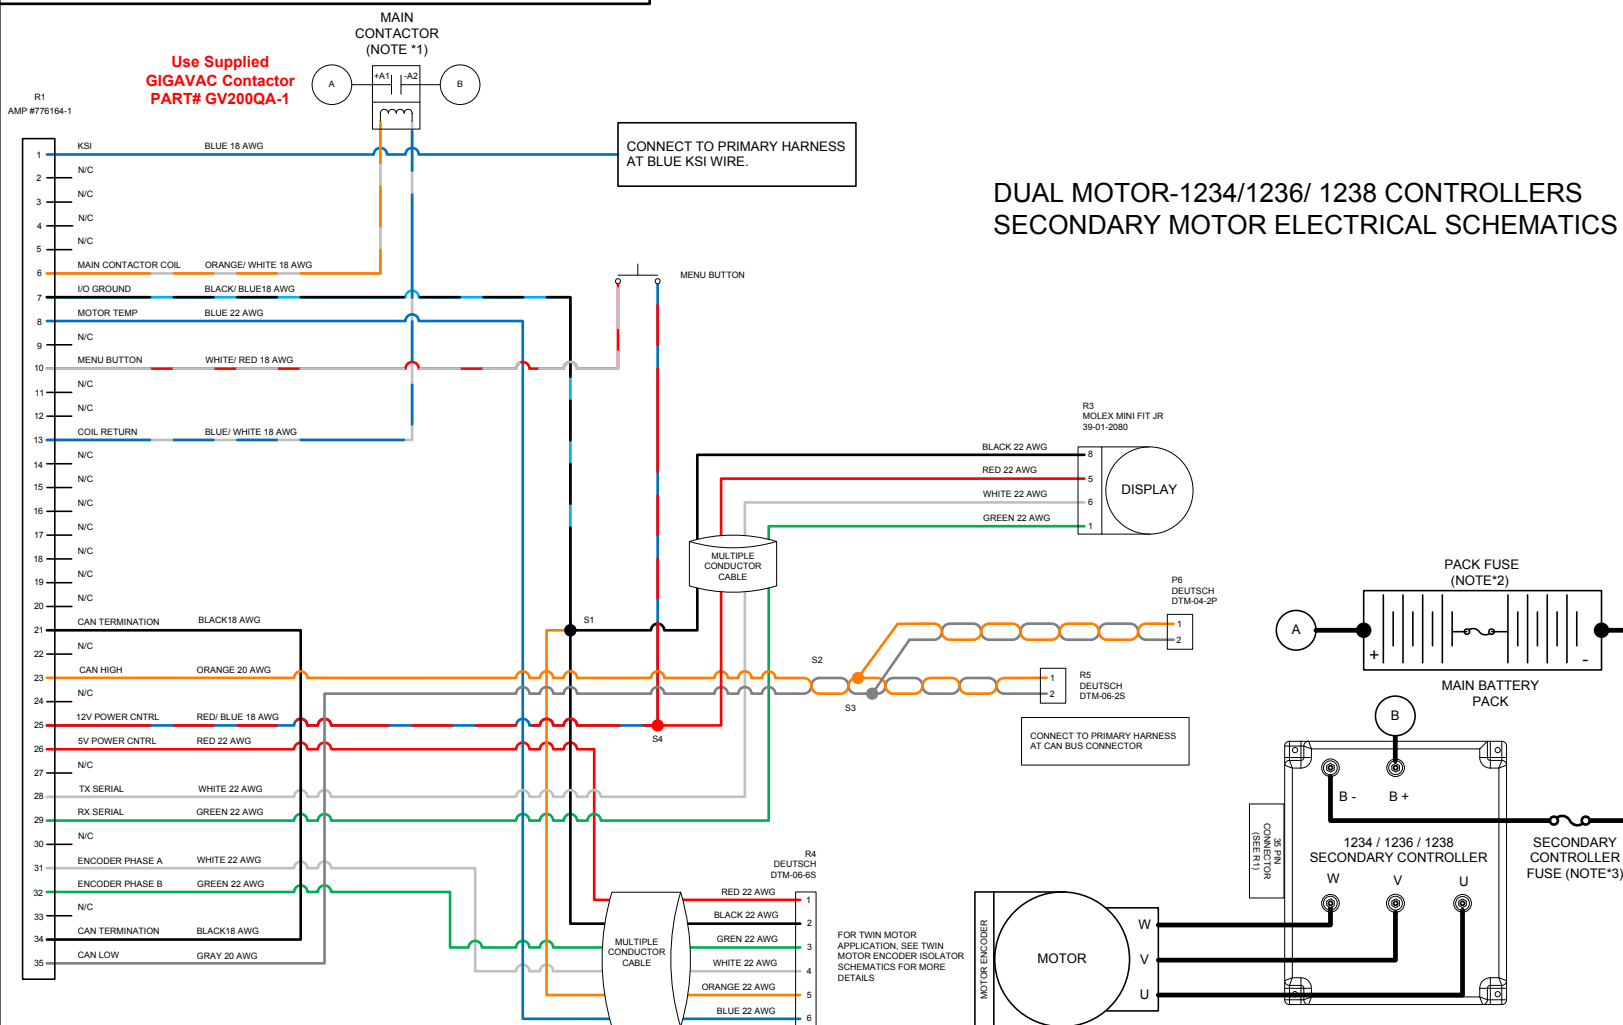

**NOTES:**

**(\*) Use supplied Contactor (GIGAVAC Part #GV200QA-1). Use only a Contactor WITHOUT PWM AND COIL SUPPRESSION. FAILURE TO DO SO CAN CAUSE CONTROLLER FAILURE AND WILL VOID WARRANTY.**


(\*2) Use Pack Fuse rated at 500A for Single controller applications. For Dual controller use 800A Pack fuse.

(\*3) Only for Dual motor application. Use Controller Fuse rated at 500A for each controller.

CAD TYPE VISIO	APPLICABLE SOFTWARE			VERSION 5.13
UNIT NONE	DRAWING 1010-AUTO-CONVERSION-TWIN MOTOR			
DRW SIZE A	TITLE SECONDARY DUAL MOTOR SCHEMATICS			
DATE 4/2/13				
SCALE 1:1	SHEET 1 OF 1	REVISION	B	<b>HPEVS</b>

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	3/11/2013
B	Revision for clarification	10/30/2013

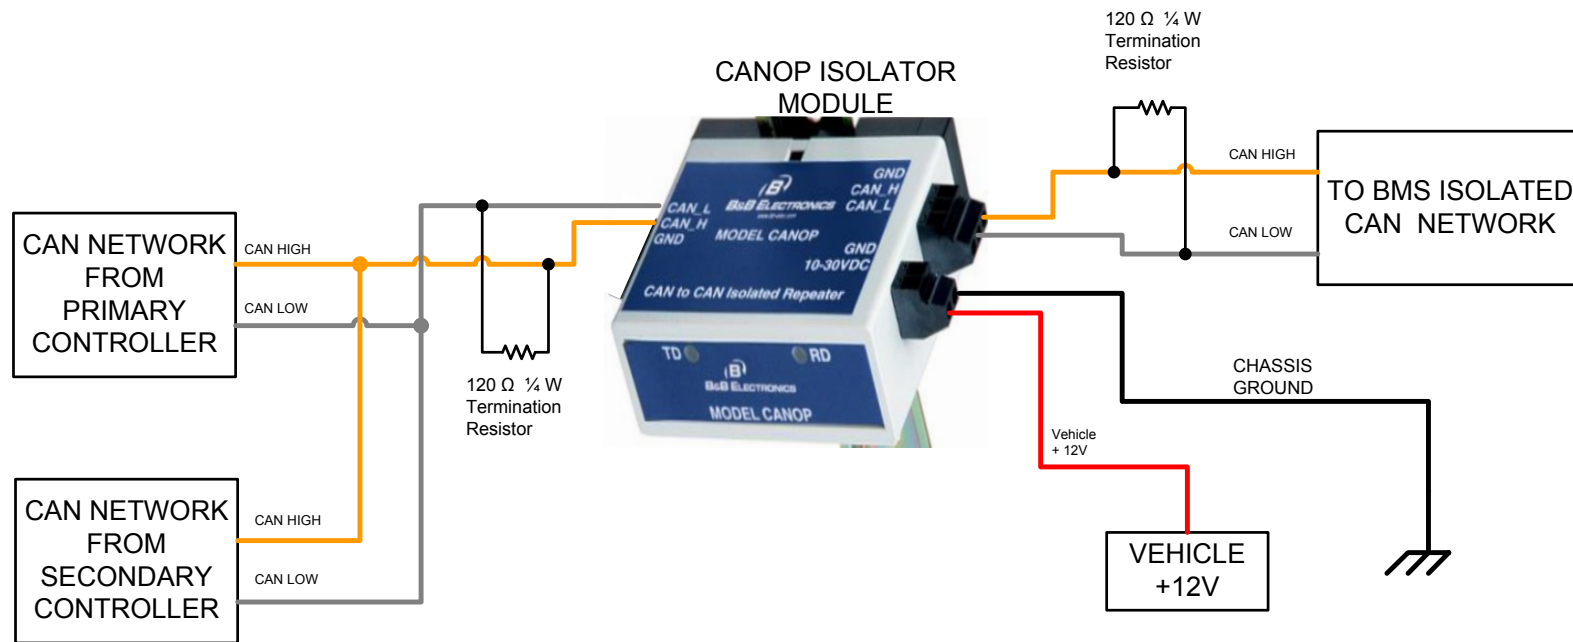

CAD TYPE VISIO	CAD LOC.	CAD FILE	DRW SIZE A
OPER. NO.	UNIT	DRAWING 1010-CAN-OP-ISOLATOR	
DESIGN	DETAIL	TITLE CAN ISOLATOR DUAL 1238 CONTROLLER	
CHECKED	SAFETY		
SCALE NONE	DATE 4/17/13	REVISION B SHEET 1 OF 1	HPEVS




## THROTTLE CONFIGURATION

Depending on the type of throttle used for the application, the different types of throttle configurations are listed within the table below. Electrical schematics are also included within the following pages.

THROTTLE CONFIGURATION	TYPE
ELECTRONIC without SWITCH	TYPE 1
2 WIRE with SWITCH 0-5k $\Omega$	TYPE 2
3 WIRE with SWITCH 0-5k $\Omega$	TYPE 3
CURTIS PB8 THROTTLE ASSEMBLY	TYPE 3

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	1/22/2013

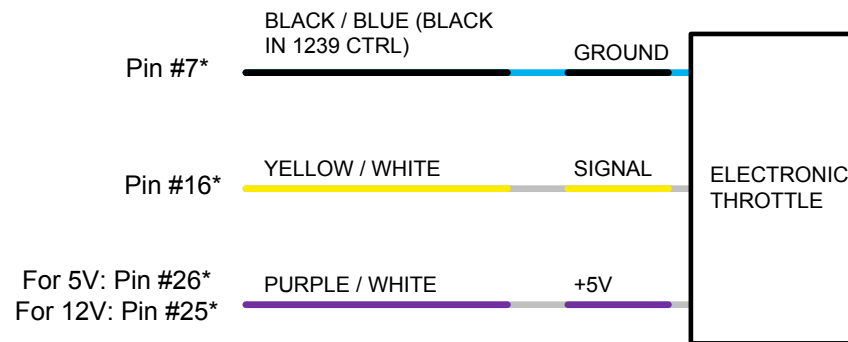

## TYPE 1 ELECTRONIC THROTTLE\*\*

\* Typical connection, verify correct voltage and connection in throttle documents or instructions.


Not all Electronic Throttles supported

\*\* When an electronic pedal is used, the GREEN wire from pedal interlock does not need to be connected

CAD TYPE VISIO	APPLICABLE SOFTWARE		
UNIT NONE	DRAWING 1010-THROTTLE-001		
DRW SIZE A	TITLE  ELECTRONIC THROTTLE		
DATE 1/22/13			
SUPPLIER PART			
SCALE NONE	SHEET 4 OF 4	REVISION B	HPEVS

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	1/22/2013

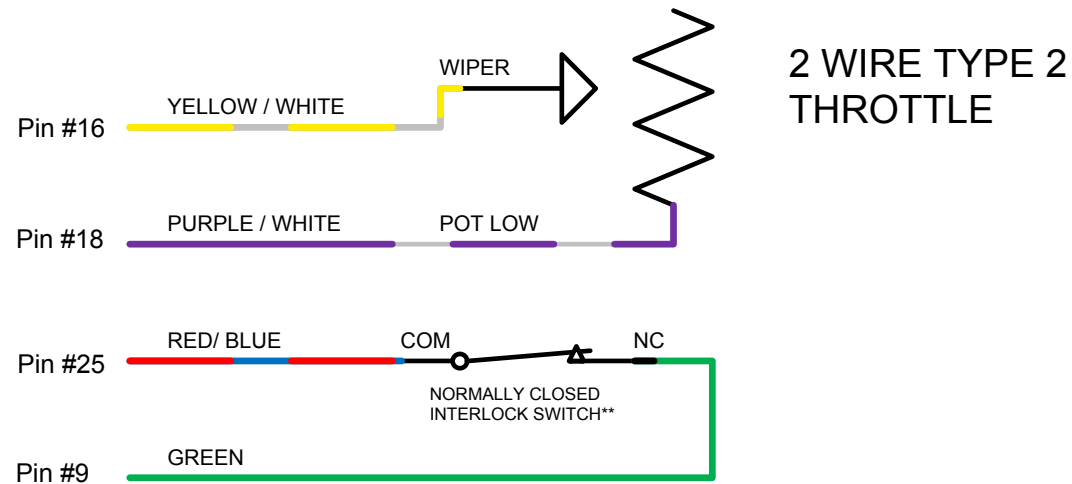


\*\* When the accelerator pedal IS PRESSED the interlock switch is released to its NORMAL position (switch not activated) thus completing the circuit since its green wire is connected to the normally closed (NC) connection.

CAD TYPE VISIO	CAD LOC.	CAD FILE	DRW SIZE A
OPER. NO.	UNIT	DRAWING 1010-THROTTLE-001	
DESIGN	DETAIL	TITLE	
CHECKED	SAFETY	2 WIRE TYPE 2 THROTTLE	
SCALE NONE	DATE 1/22/13	REVISION A SHEET 1 OF 3	HPEVS

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	1/22/2013

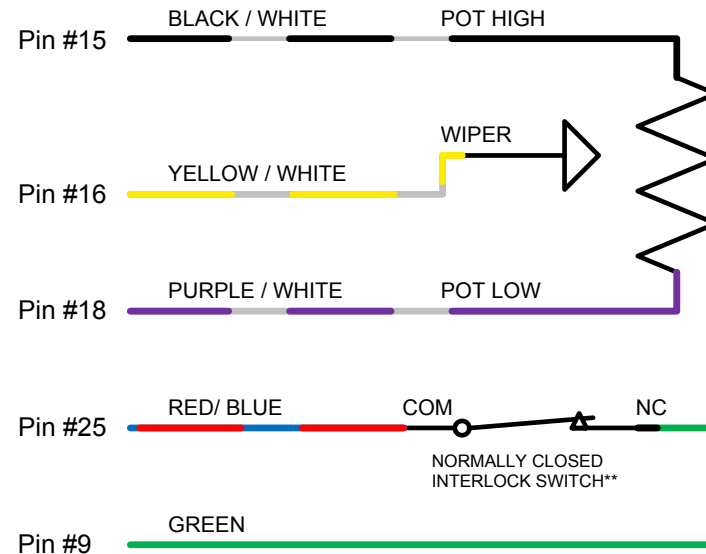


3 WIRE TYPE 3  
THROTTLE

\*\* When the accelerator pedal IS PRESSED the interlock switch is released to its NORMAL position (switch not activated) thus completing the circuit since its green wire is connected to the normally closed (NC) connection.

CAD TYPE VISIO	CAD LOC.	CAD FILE	DRW SIZE A
OPER. NO.	UNIT	DRAWING 1010-THROTTLE-001	
DESIGN	DETAIL	TITLE 3 WIRE TYPE 3 THROTTLE	
CHECKED	SAFETY		
SCALE NONE	DATE 1/22/13	REVISION A SHEET 2 OF 3	HPEVS

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	11/27/2013

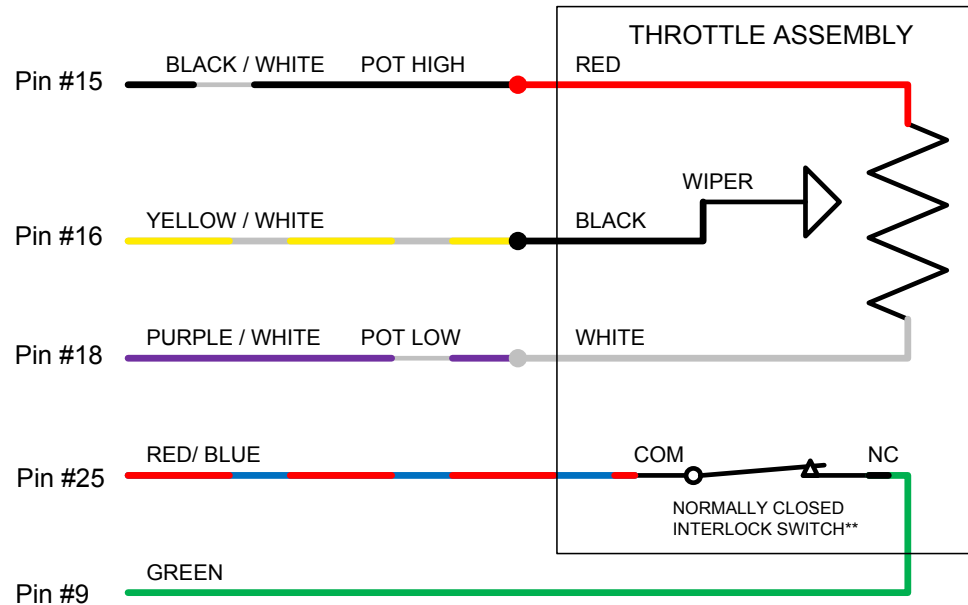

## CURTIS PB8 THROTTLE ASSEMBLY


\*\* When the accelerator pedal IS PRESSED the interlock switch is released to its NORMAL position (switch not activated) thus completing the circuit since its green wire is connected to the normally closed (NC) connection.

CAD TYPE VISIO	APPLICABLE SOFTWARE		
UNIT NONE	DRAWING 1010-THROTTLE-001		
DRW SIZE A	TITLE CURTIS PB8 THROTTLE ASSEMBLY		
DATE 1/22/13			
SUPPLIER PART			
SCALE NONE	SHEET 3 OF 4	REVISION A	HPEVS

## PEDAL INTERLOCK CONNECTION

The pedal interlock connection is required for both 2 and 3 wire throttle pot assemblies. The Green wire is connected to the Normally Closed tab. The red/blue wire is connected to the common tab. See picture below.

NOTE: when the accelerator pedal IS PRESSED the interlock switch is released to its NORMAL position (switch not activated) thus completing the circuit since its green wire is connected to the normally closed (NC) connection.

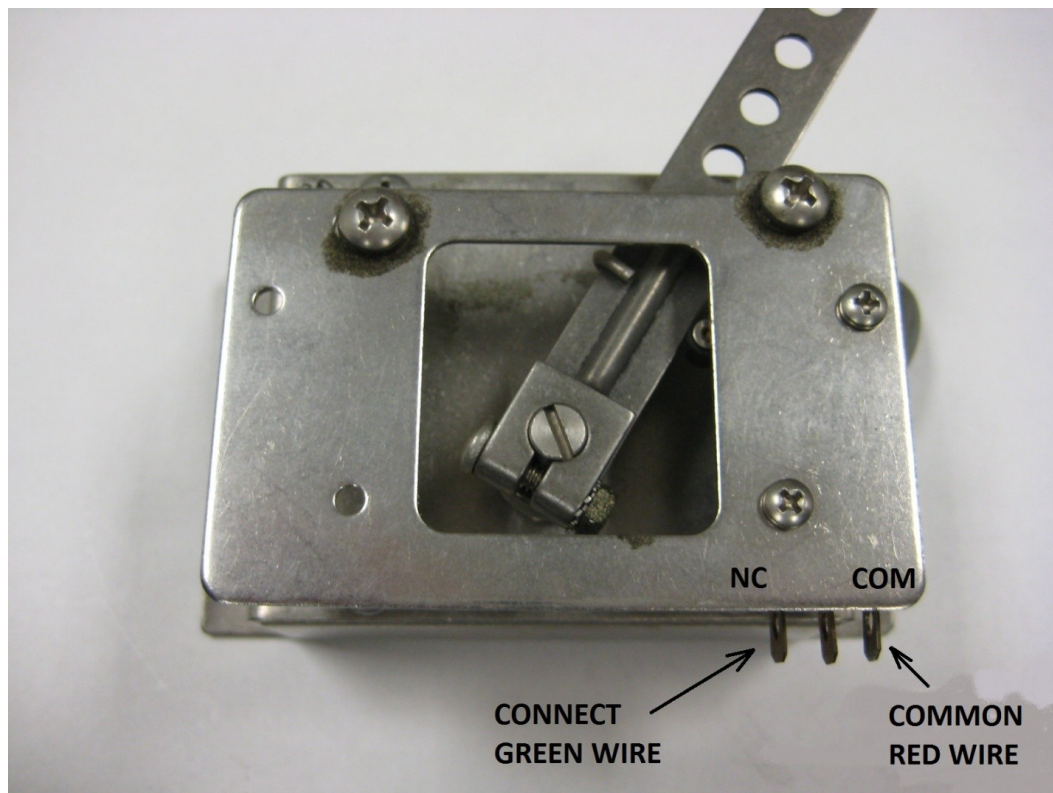


## BRAKE INPUT CONFIGURATION

Depending on the type of brake input used for the application, the different types of brake input configurations are listed within the table below. Electrical schematics are also included in the following pages.

<b>BRAKE INPUT CONFIGURATION</b>	<b>TYPE</b>
NO BRAKE POT INSTALLED	TYPE 0
PRESSURE TRANSDUCER/ ELECTRONIC 0-5V INPUT	TYPE 1
2 WIRE 0-5k $\Omega$ POT	TYPE 2
SWITCH	TYPE 3

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	2/19/2013

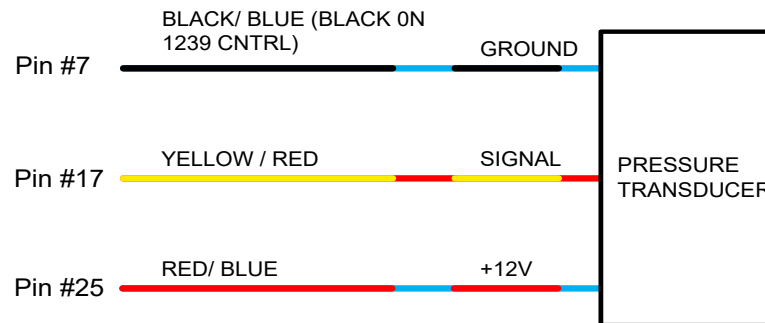

## TYPE 1 PRESSURE TRANSDUCER



**\*\* Typical Pressure Transducer Ratings**  
 8-30 Volt Input  
 1-5 Volt Output  
 2500 PSI


**Website Link:** [www.digikey.com](http://www.digikey.com)  
**Part Number:** M3041-000005-2K5PG-ND  
**Manufacturer Part #:** M3041-000005-2K5PG

CAD TYPE VISIO	CAD LOC.	CAD FILE	DRW SIZE A
OPER. NO.	UNIT	DRAWING 1010-BRAKE	
DESIGN	DETAIL	TITLE PRESSURE TRANSDUCER	
CHECKED	SAFETY		
SCALE NONE	DATE 2/19/13	REVISION A	<b>HPEVS</b>
		SHEET 2 OF 2	



**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	2/19/2013

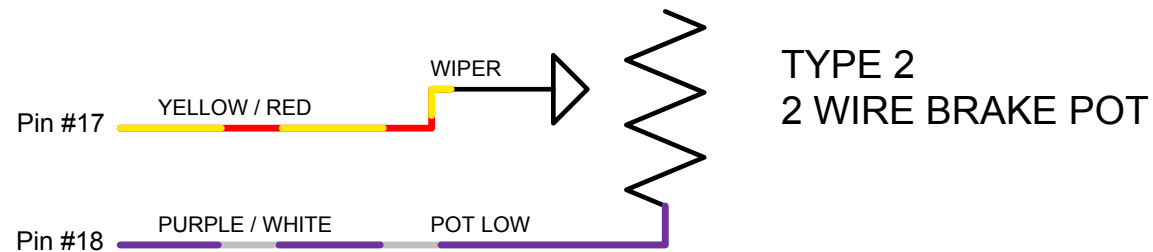

CAD TYPE VISIO	CAD LOC.	CAD FILE	DRW SIZE A
OPER. NO.	UNIT	DRAWING 1010-BRAKE	
DESIGN	DETAIL	TITLE 2 WIRE BRAKE POT	
CHECKED	SAFETY		
SCALE NONE	DATE 2/19/13	REVISION A SHEET 1 OF 2	HPEVS


## OPTIONAL ACTIVE BRAKE LIGHT CONFIGURATIONS

These optional active brake light configurations are used to activate the brake lights during regenerative braking or when the vehicle brakes are being applied. Based on the brake type configuration that is being used in the application use one of the following wiring configurations.

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	2/19/2013

## ACTIVE BRAKE LIGHT CONFIGURATION OPTION 1 FOR BRAKE TYPE 0, 1 OR 2 CONFIGURATIONS

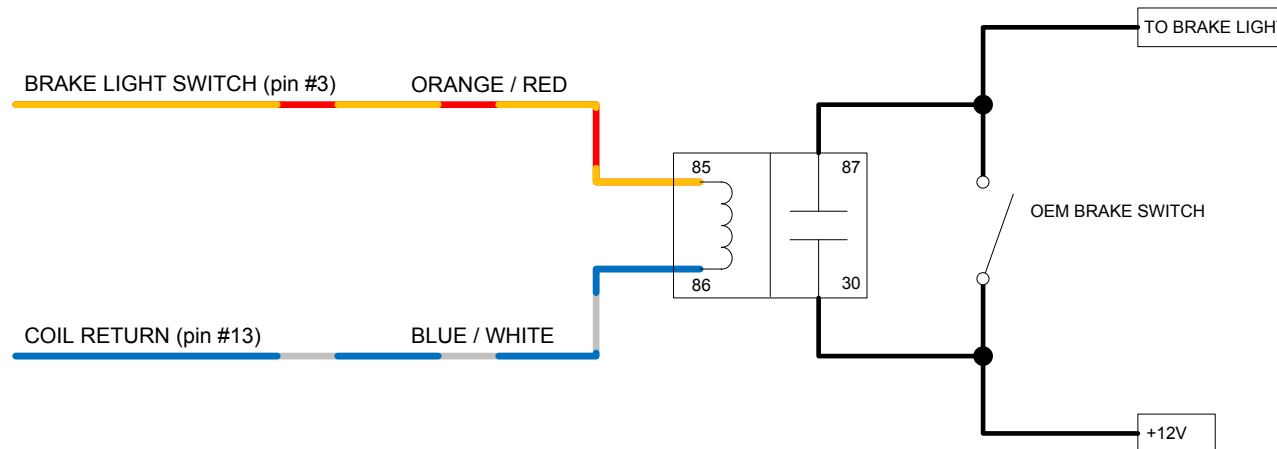


\*\* This option turns the brake lights ON during REGEN. Brake TYPE 0 does not allow for BOOSTED BRAKE while pressing the brake pedal. Brake TYPE 1 & 2 uses a variable input for BOOSTED REGEN.

CAD TYPE VISIO	CAD LOC.	CAD FILE	DRW SIZE A
OPER. NO.	UNIT	DRAWING 1010-BRAKE	
DESIGN	DETAIL	TITLE OPTION 1 BRAKE LIGHT SWITCH	
CHECKED	SAFETY		
SCALE NONE	DATE 12/5/13	REVISION A SHEET 3 OF 4	HPEVS

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

REVISIONS		
REV	DESCRIPTION	APPROVED
A	INITIAL RELEASE	2/19/2013


## ACTIVE BRAKE LIGHT CONFIGURATION OPTION 2 FOR BRAKE TYPE 3 1234, 1236, & 1238 CONTROLLER

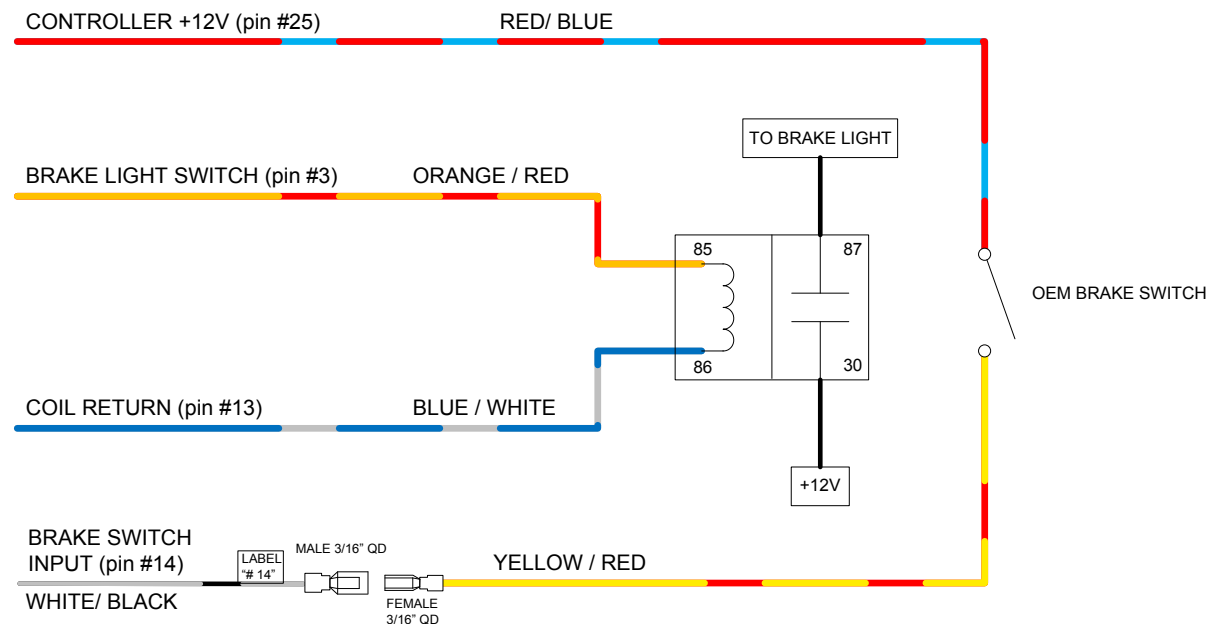

- \*\* This option will turn ON the brake lights when either of two conditions are satisfied:**
1. The users foot is OFF of the accelerator pedal and REGEN is active.
  2. Brake pressure is applied and the OEM brake switch is active.

CAD TYPE VISO	CAD LOC.	CAD FILE	DRW SIZE A
OPER. NO.	UNIT	DRAWING 1010-BRAKE	
DESIGN	DETAIL	TITLE OPTION 2 BRAKE LIGHT SWITCH 1234, 1236, & 1238 CONTROLLER	
CHECKED	SAFETY		
SCALE NONE	DATE 12/5/13	REVISION A SHEET 3 OF 4	HPEVS

**NOTICE:** This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

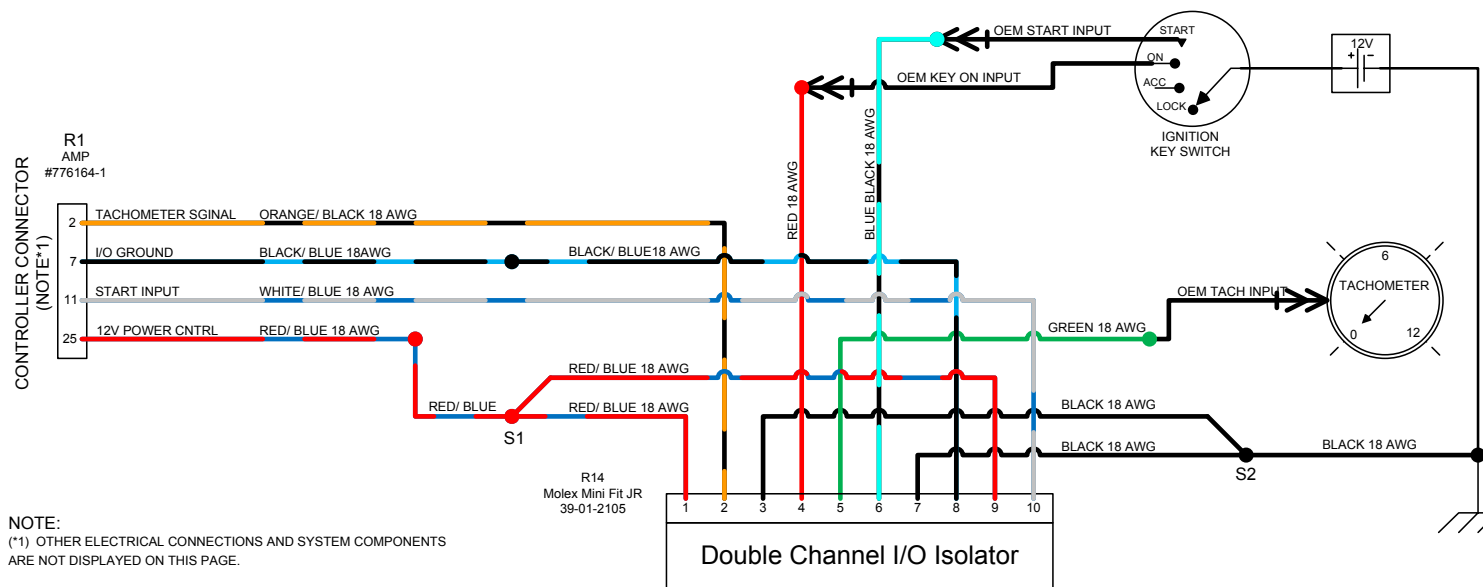

**NOTE:**  
 (\*1) OTHER ELECTRICAL CONNECTIONS AND SYSTEM COMPONENTS ARE NOT DISPLAYED ON THIS PAGE.

#### I/O ISOLATOR PIN FUNCTION

- 1 – CHANNEL 1 CONTROLLER 12V
- 2 – CHANNEL 1 TACHOMETER SIGNAL
- 3 – CHANNEL 1 GROUND
- 4 – CHANNEL 1 VEHICLE 12V
- 5 – CHANNEL 1 OUTPUT TO TACHOMETER
- 6 – CHANNEL 2 IGNITION KEY INPUT
- 7 – CHANNEL 2 GROUND
- 8 – CHANNEL 2 CONTROLLER I/O GROUND
- 9 – CHANNEL 2 CONTROLLER 12V
- 10 – CHANNEL 2 CONTROLLER START INPUT

CAD TYPE VISIO	CAD LOC.	CAD FILE	DRW SIZE B
OPER. NO.	UNIT	DRAWING 1010-2CH-ISOLATOR-001	
DESIGN	DETAIL	TITLE DUAL CHANNEL OPTO-ISOLATOR SYSTEM SCHEMATICS	
CHECKED	SAFETY		
SCALE NONE	DATE 4/19/12	REVISION B SHEET 1 OF 1	HPEVS