




**1551 S. Vineyard Avenue
Ontario, CA 91761
(909) 923-1973**

WIRING SCHEMATICS

YAMAHA DRIVE GOLF CAR

REVISION: B

NOTICE: This drawing is the property of Hi Performance Electric Vehicle Systems Inc., and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

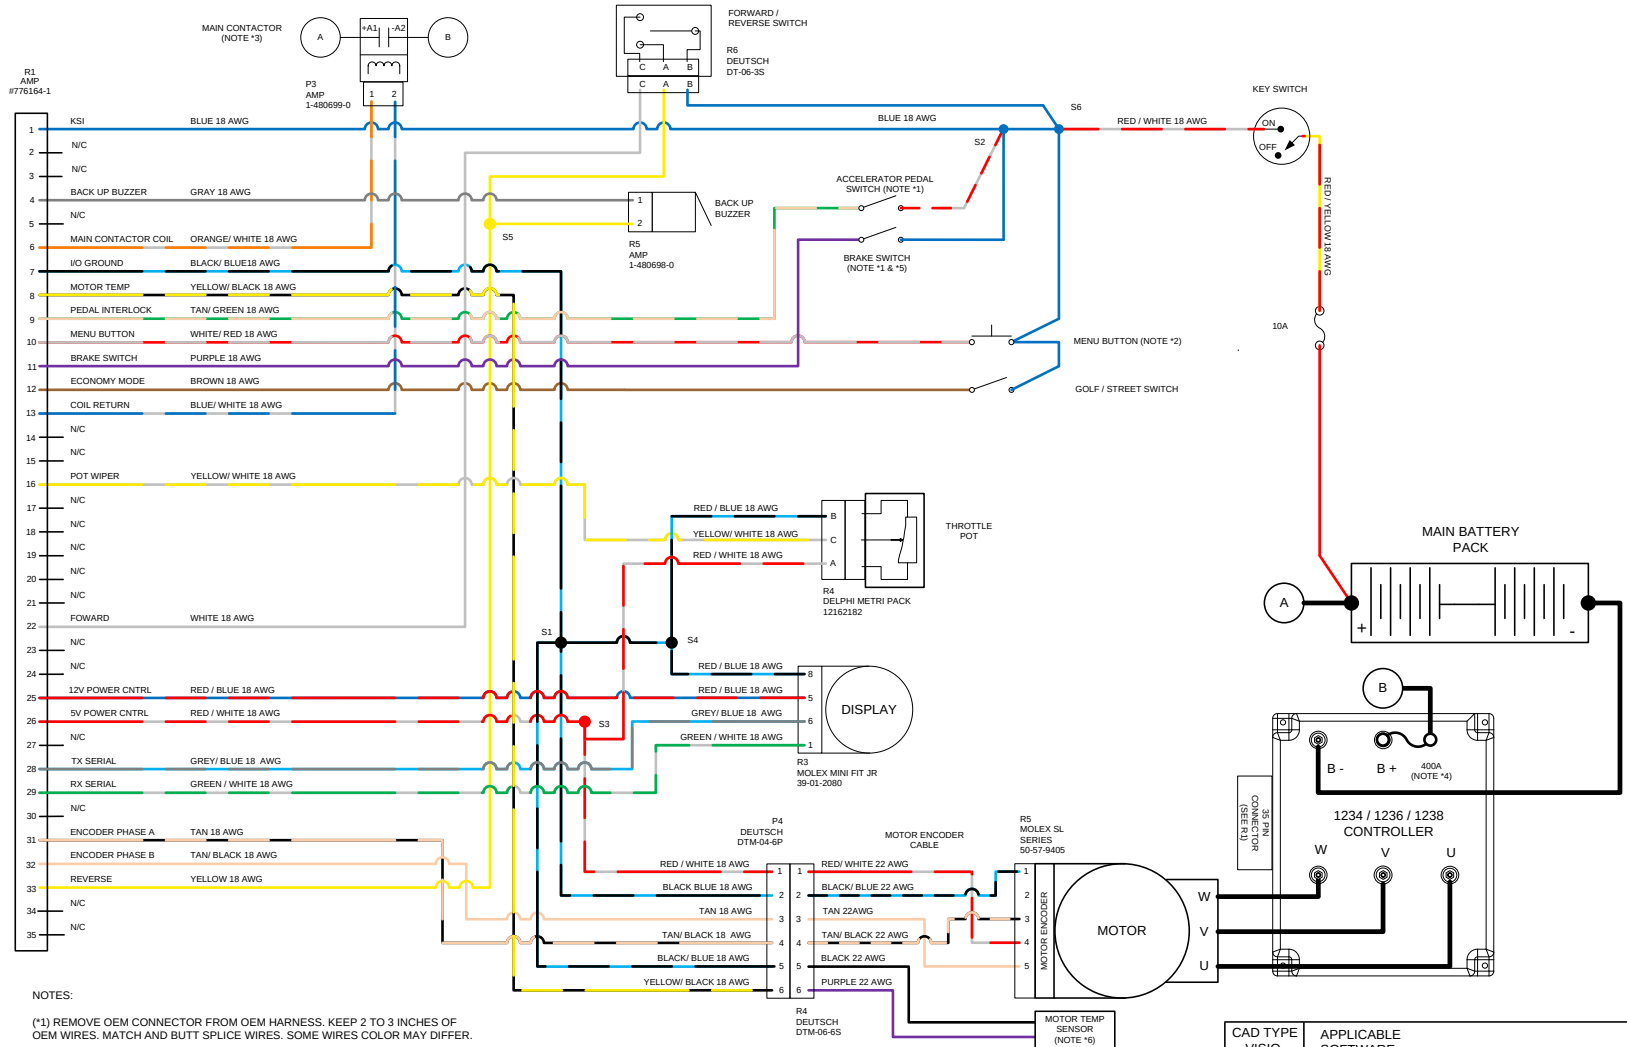

- NOTES:
- (*1) REMOVE OEM CONNECTOR FROM OEM HARNESS. KEEP 2 TO 3 INCHES OF OEM WIRES. MATCH AND BUTT SPLICE WIRES. SOME WIRES COLOR MAY DIFFER.
 - (*2) MENU BUTTON IS OPTIONAL. USE WITH DISPLAY
 - (*3) REMOVE ANY DIODES OR RESISTOR FROM MAIN CONTACTOR
 - (*4) USE 400A FUSE IN 650 SYSTEM. USE 300A FUSE IN 350 SYSTEM
 - (*5) NORMALLY OPEN. CONTACTS MUST BE CLOSED WHEN BRAKE PEDAL IS PRESSED
 - (*6) MOTOR TEMP SENSOR NOT USED FOR YAMAHA GOLF CART APPLICATION.

CAD TYPE	VISIO			APPLICABLE SOFTWARE
UNIT	NONE			DRAWING 1010-YAMADRV
DRW SIZE	A			TITTLE
DATE	12/15/10			YAMAHA DRIVE GOLF CAR SCHEMATIC
SCALE	1:1			SHEET 1 OF 1
	REVISION			B
				HPEVS