




**620 Magnolia Avenue
Suite B
Ontario, CA 91762
(909) 923-1973**

WIRING SCHEMATICS

YAMAHA GOLF CART

NOTICE: This drawing is the property of H Performance Electric Vehicle Systems Inc. and/or its subsidiaries and affiliates (individually and collectively "HPEVS"), and contains highly proprietary, confidential, and trade secret information of HPEVS. The recipient of this drawing agrees (a) to use the information contained herein for the purpose for which it was furnished by HPEVS (b) to return this drawing upon HPEVS request. This notice shall appear on any complete or partial reproduction of this drawing.

| REVISIONS | | |
|-----------|---|-----------|
| REV | DESCRIPTION | APPROVED |
| D | Change wire gauge from 18 to 20 AWG Change wire color at D2 from Blue to Red/Blue Change wire color at E1 from Tan/Green to Green Change wire color at E2 from Red/White to Red/Blue Change wire color at H1 from Red/White to Blue Change wire color at H2 from Red/Yellow to Red Change wire color at H6 & H7 from Blue to Blue/Red Move splices S2 & S6 | 9/12/2017 |

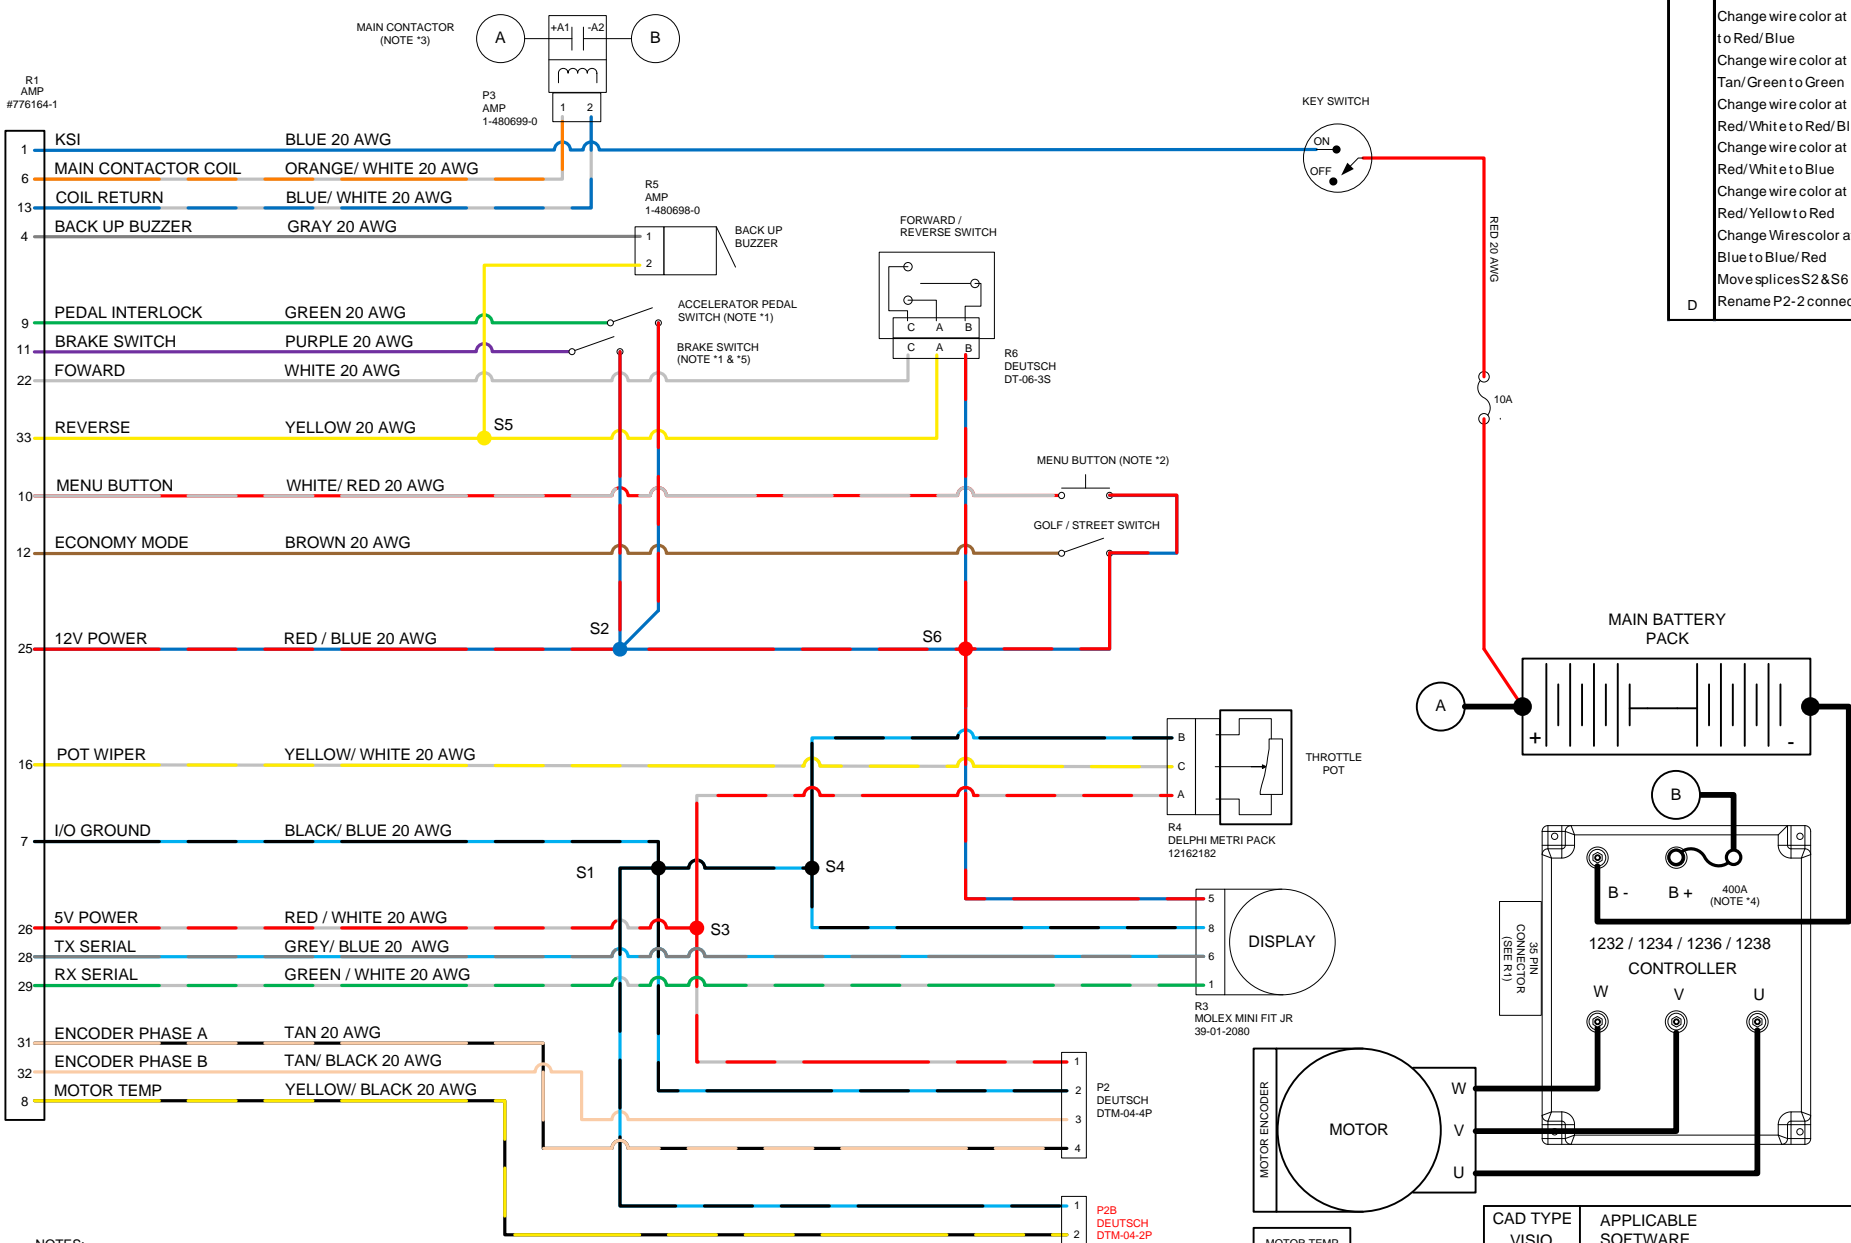

- NOTES:
- (*1) REMOVE OEM CONNECTOR FROM OEM HARNESS. KEEP 2 TO 3 INCHES OF OEM WIRES. MATCH AND BUTT SPLICE WIRES. SOME WIRES COLOR MAY DIFFER.
 - (*2) MENU BUTTON IS OPTIONAL. USE WITH DISPLAY
 - (*3) REMOVE ANY DIODES OR RESISTOR FROM MAIN CONTACTOR
 - (*4) USE 400A FUSE IN 650 SYSTEM. USE 300A FUSE IN 350 SYSTEM
 - (*5) NORMALLY OPEN. CONTACTS MUST BE CLOSED WHEN BRAKE PEDAL IS PRESSED

| | |
|---------------|----------------------------------|
| CAD TYPE | APPLICABLE SOFTWARE |
| VISION | DRAWING |
| UNIT | 1010-YAMADRV |
| NONE | |
| DRW SIZE | TITLE |
| A | YAMAHA DRIVE GOLF CAR SCHEMATICS |
| DATE | |
| 12/15/10 | |
| SUPPLIER PART | HW-1010YAMDRV001-HPG |
| SCALE | SHEET 1 OF 1 |
| 1:1 | REVISION D |
| | HPEVS |