


Conditions:
target maximum controller current at a target
of motor temp 120° C - 130° C.
Motor was ran at each Current/RPM
combination for 20 minutes

HPEVS AC-34x2 Metric Continuous Graph

72 Volt

Oil Cooled

Oil Type: Shell Diala S2 ZX-A (Diala AX)
Oil cooling conditions:
Oil pumped through 16" heat exchanger
at 1.9 GPM
Faucet water sent through heat
exchanger at a rate of 3 GPM

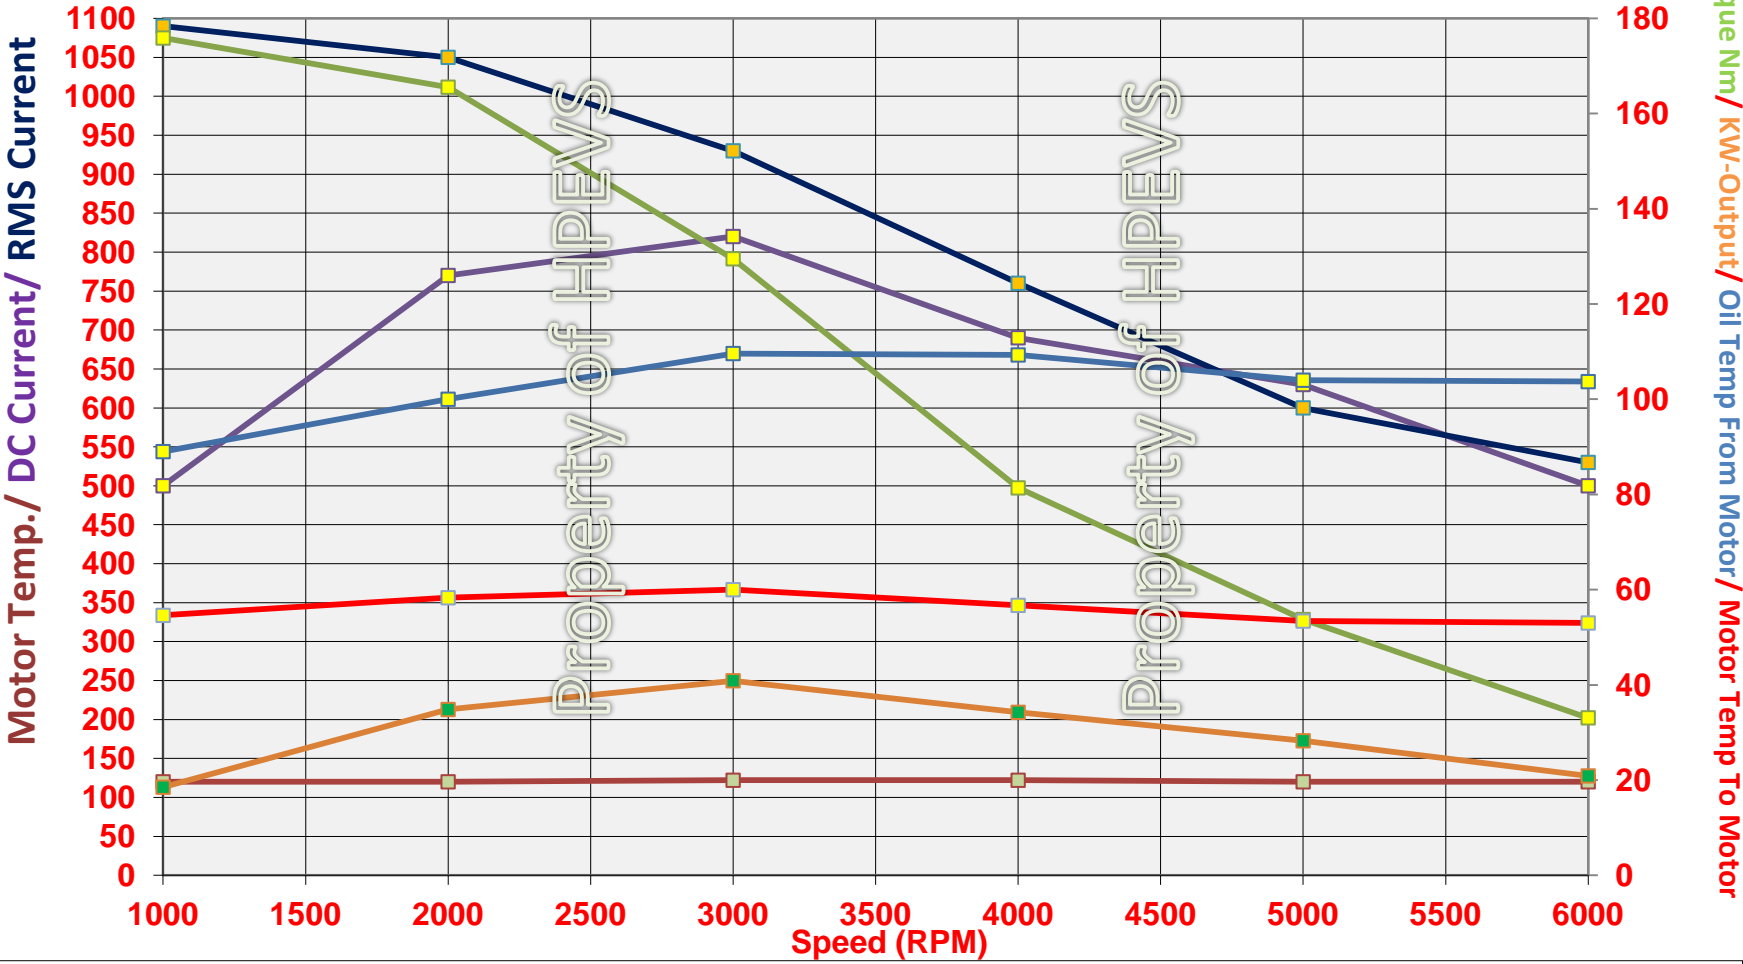

Motor Temp DC Current RMS Current Torque-Nm KW-Output Oil Temp from motor °C Oil Temp to motor °C

ALL RIGHTS RESERVED. This graph is protected under the International and Federal Copyright Laws and Treaties. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the publisher.

2015©, HPEVS