


Conditions:
 target maximum controller current at a target motor
 temp of 120° C - 130° C.
 Motor was ran at each Current/RPM combination for
 20 minutes

HPEVS AC-35x2 Metric Continuous Graph

144 Volt

Oil Cooled

Oil Type: Valvoline MAX Life Full synthetic automatic
 transmission fluid (DEX/MERC) MERCON LV
 Oil cooling conditions:
 Oil pumped through 16" heat exchanger at 1.9 GPM
 Faucet water sent through heat exchanger at a rate of
 3 GPM

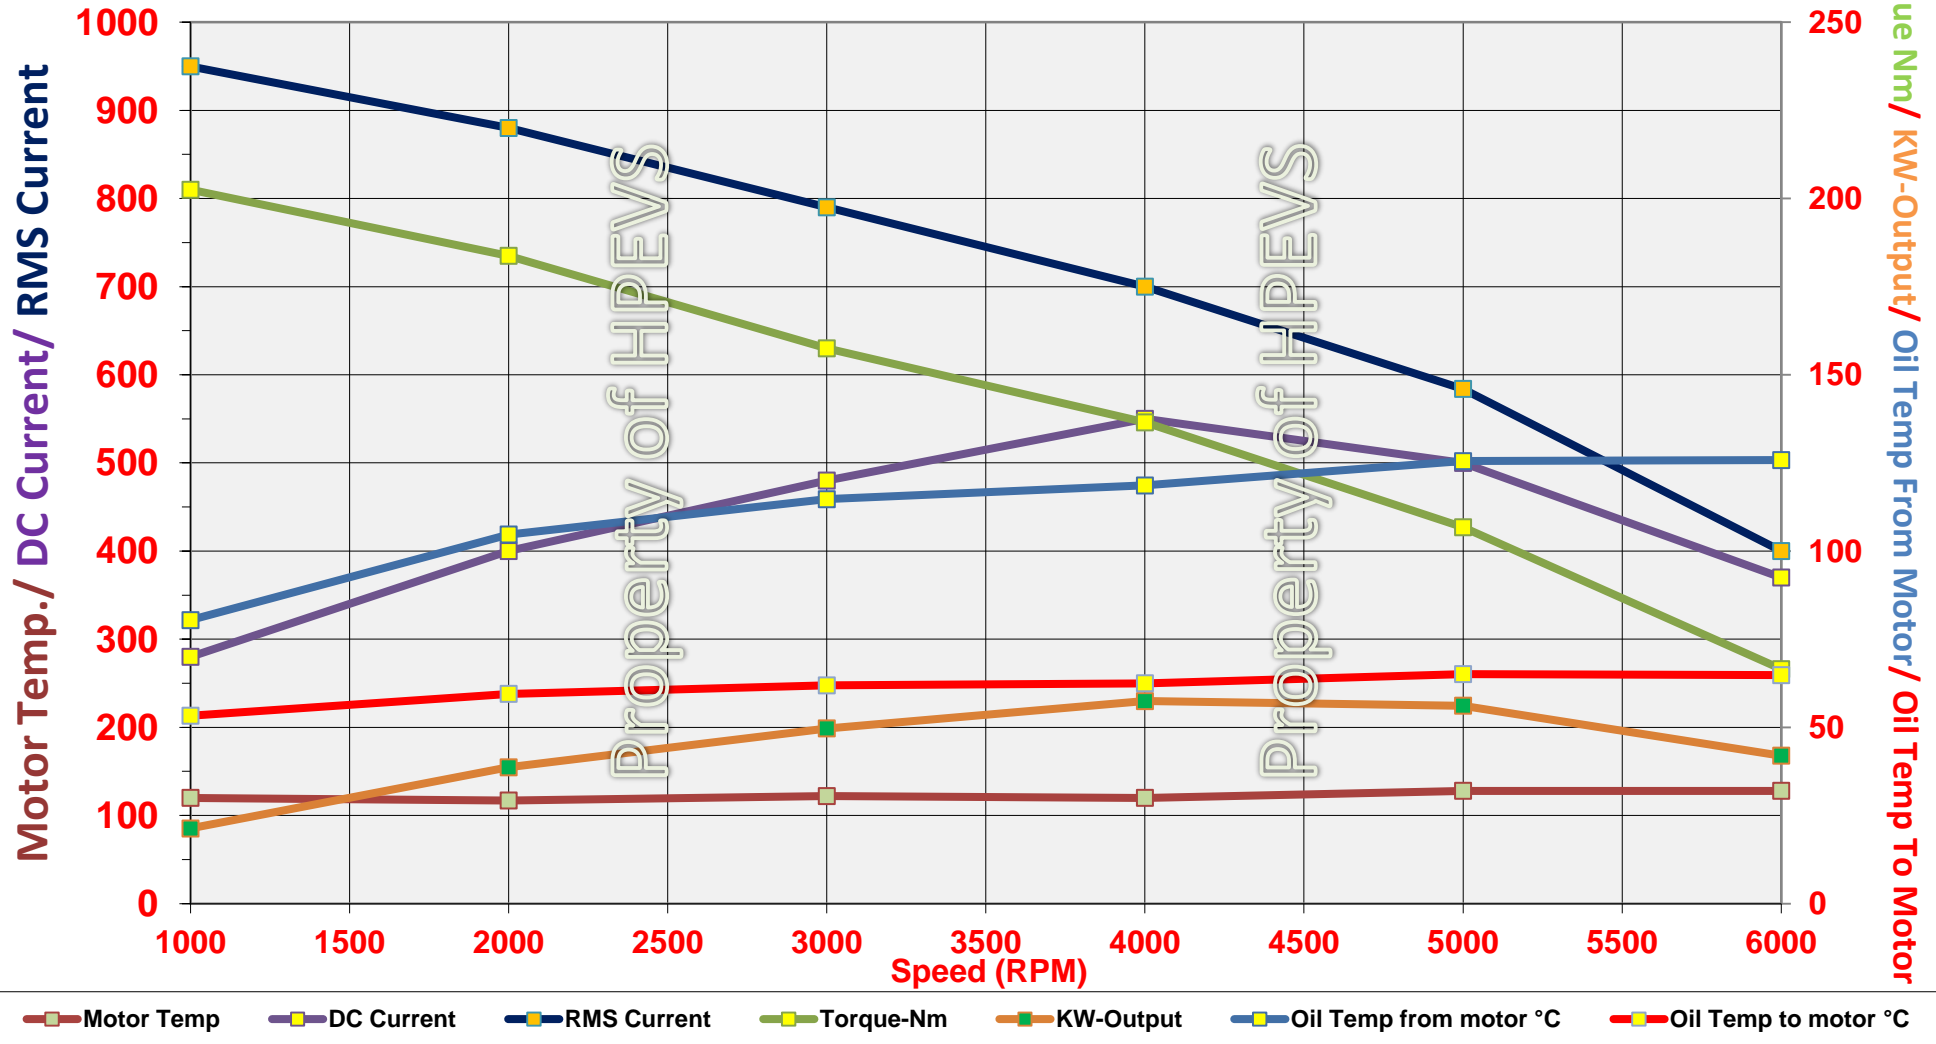

ALL RIGHTS RESERVED. This graph is protected under the International and Federal Copyright Laws and Treaties. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the publisher.

2015©, HPEVS